

- **Excellent Output Drive Capability**  
 $V_O = \pm 2.5 \text{ V Min at } R_L = 100 \, \Omega$ ,  
 $V_{CC\pm} = \pm 5 \text{ V}$   
 $V_O = \pm 12.5 \text{ V Min at } R_L = 600 \, \Omega$ ,  
 $V_{CC\pm} = \pm 15 \text{ V}$
- **Low Supply Current . . . 280 μA Typ**
- **Decompensated for High Slew Rate and Gain-Bandwidth Product**  
 $A_{VD} = 0.5 \text{ Min}$   
**Slew Rate = 10 V/μs Typ**  
**Gain-Bandwidth Product = 6.5 MHz Typ**


- **Wide Operating Supply Voltage Range**  
 $V_{CC\pm} = \pm 3.5 \text{ V to } \pm 18 \text{ V}$
- **High Open-Loop Gain . . . 280 V/mV Typ**
- **Low Offset Voltage . . . 500 μV Max**
- **Low Offset Voltage Drift With Time**  
**0.04 μV/Month Typ**
- **Low Input Bias Current . . . 5 pA Typ**

## description

The TLE2161, TLE2161A, and TLE2161B are JFET-input, low-power, precision operational amplifiers manufactured using the Texas Instruments Excalibur process. Decompensated for stability with a minimum closed-loop gain of 5, these devices combine outstanding output drive capability with low power consumption, excellent dc precision, and high gain-bandwidth product.

In addition to maintaining the traditional JFET advantages of fast slew rates and low input bias and offset currents, the Excalibur process offers outstanding parametric stability over time and temperature. This results in a device that remains precise even with changes in temperature and over years of use.

**MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE  
vs  
LOAD RESISTANCE**

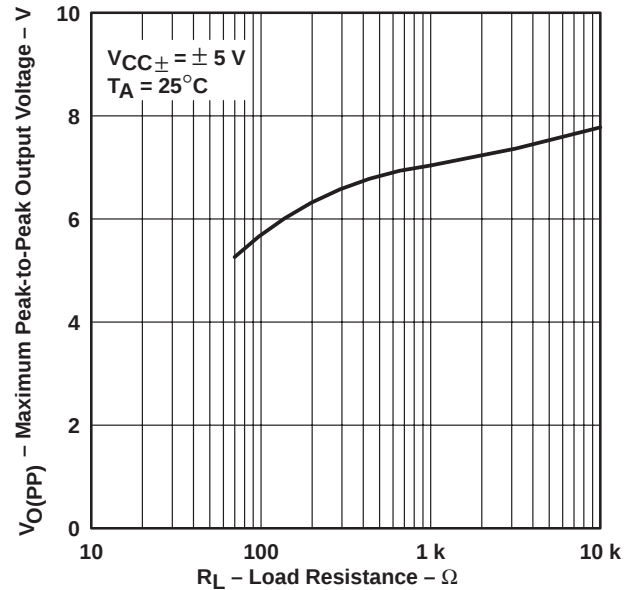

## AVAILABLE OPTIONS

| $T_A$                | $V_{IOmax}$<br>AT 25°C   | PACKAGE                      |                                |                                          |                                       |
|----------------------|--------------------------|------------------------------|--------------------------------|------------------------------------------|---------------------------------------|
|                      |                          | SMALL<br>OUTLINE<br>(D)      | CHIP<br>CARRIER<br>(FK)        | CERAMIC<br>DIP<br>(JG)                   | PLASTIC<br>DIP<br>(P)                 |
| 0°C<br>to<br>70°C    | 500 μV<br>1.5 mV<br>3 mV | —<br>TLE2161ACD<br>TLE2161CD | —<br>—                         | —<br>—                                   | TLE2161BCP<br>TLE2161ACP<br>TLE2161CP |
| –40°C<br>to<br>85°C  | 500 μV<br>1.5 mV<br>3 mV | —<br>TLE2161AID<br>TLE2161ID | —<br>—                         | —<br>—                                   | TLE2161BIP<br>TLE2161AIP<br>TLE2161IP |
| –55°C<br>to<br>125°C | 500 μV<br>1.5 mV<br>3 mV | —<br>TLE2161AMD<br>TLE2161MD | —<br>TLE2161AMFK<br>TLE2161MFK | TLE2161BMJG<br>TLE2161AMJG<br>TLE2161MJG | TLE2161BMP<br>TLE2161AMP<br>TLE2161MP |

The D packages are available taped and reeled. Add R suffix to device type (e.g., TLE2161ACDR).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1996, Texas Instruments Incorporated

# TLE2161, TLE2161A, TLE2161B

## EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE



### μPOWER OPERATIONAL AMPLIFIERS

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

#### description (continued)


A variety of available options includes small-outline packages and chip-carrier versions for high-density system applications.

The C-suffix devices are characterized for operation from 0°C to 70°C. The I-suffix devices are characterized for operation from – 40°C to 85°C. The M-suffix devices are characterized for operation over the full military temperature range of – 55°C to 125°C.

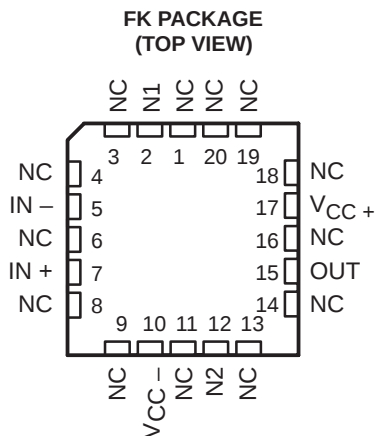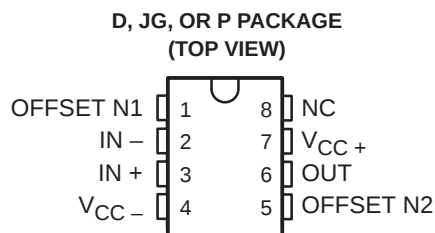

NC – No internal connection

#### equivalent schematic

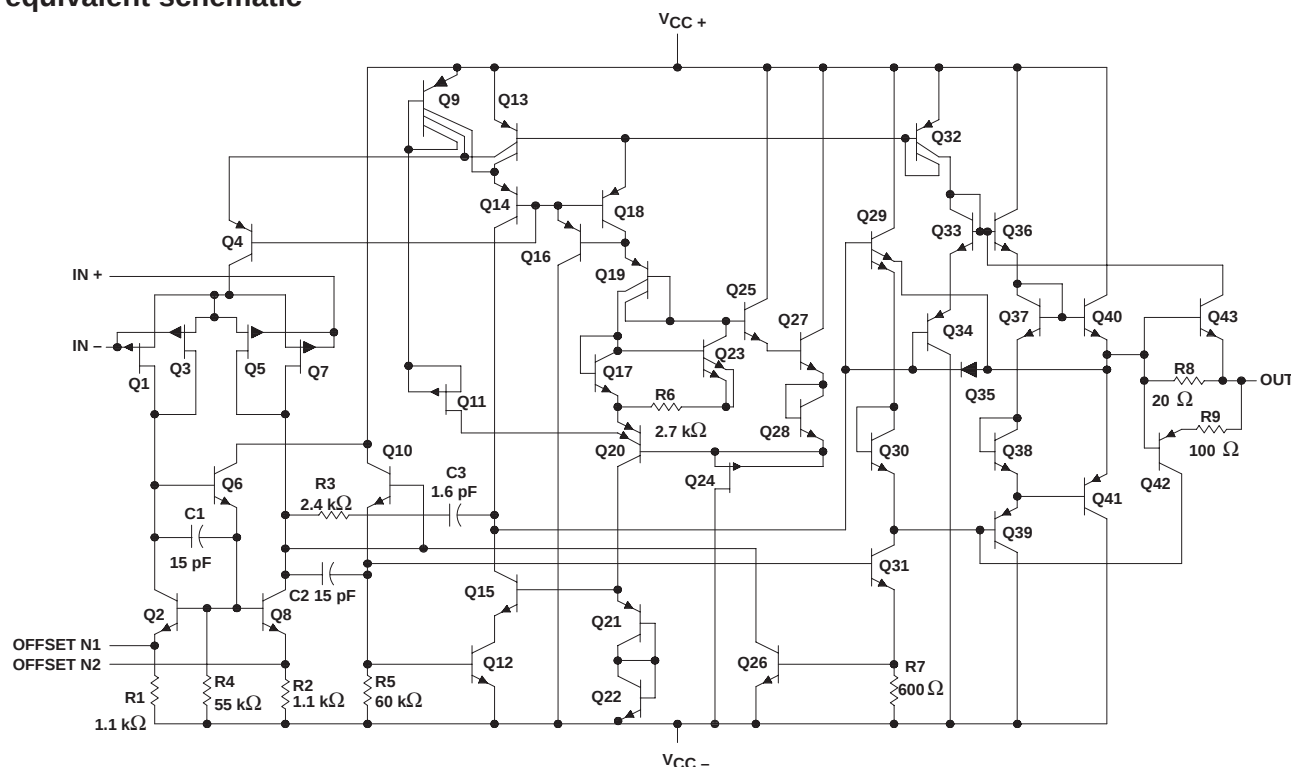

All component values are nominal.

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>**

|                                                                              |                              |
|------------------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{CC+}$ (see Note 1)                                       | 19 V                         |
| Supply voltage, $V_{CC-}$                                                    | – 19 V                       |
| Differential input voltage, $V_{ID}$ (see Note 2)                            | ± 38 V                       |
| Input voltage range, $V_I$ (any input)                                       | $V_{CC+}$ ±                  |
| Input current, $I_I$ (each input)                                            | ± 1 mA                       |
| Output current, $I_O$                                                        | ± 80 mA                      |
| Total current into $V_{CC+}$                                                 | 80 mA                        |
| Total current out of $V_{CC-}$                                               | 80 mA                        |
| Duration of short-circuit current at (or below) 25°C (see Note 3)            | unlimited                    |
| Continuous total power dissipation                                           | See Dissipation Rating Table |
| Operating free-air temperature range, $T_A$ : C suffix                       | 0°C to 70°C                  |
| I suffix                                                                     | – 40°C to 85°C               |
| M suffix                                                                     | – 55°C to 125°C              |
| Storage temperature range, $T_{stg}$                                         | – 65°C to 150°C              |
| Case temperature for 60 seconds: FK package                                  | 260°C                        |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D or P package | 260°C                        |
| Lead temperature 1,6 mm (1/16 inch) from case for 60seconds: JG package      | 300°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .  
 2. Differential voltages are at  $IN+$  with respect to  $IN-$ .  
 3. The output may be shorted to either supply. Temperature and /or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

**DISSIPATION RATING TABLE**

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D       | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   | 377 mW                                   | 145 mW                                    |
| FK      | 1375 mW                                     | 11.0 mW/°C                                        | 880 mW                                   | 715 mW                                   | 275 mW                                    |
| JG      | 1050 mW                                     | 8.4 mW/°C                                         | 672 mW                                   | 546 mW                                   | 210 mW                                    |
| P       | 1000 mW                                     | 8.0 mW/°C                                         | 640 mW                                   | 520 mW                                   | 200 mW                                    |

**recommended operating conditions**

|                                       |                             | C SUFFIX |     | I SUFFIX |     | M SUFFIX |     | UNIT |
|---------------------------------------|-----------------------------|----------|-----|----------|-----|----------|-----|------|
|                                       |                             | MIN      | MAX | MIN      | MAX | MIN      | MAX |      |
| Supply voltage, $V_{CC\pm}$           |                             | ±3.5     | ±18 | ±3.5     | ±18 | +3.5     | ±18 | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{CC\pm} \pm 5\text{ V}$  | –1.6     | 4   | –1.6     | 4   | –1.6     | 4   | V    |
|                                       | $V_{CC\pm} \pm 15\text{ V}$ | –11      | 13  | –11      | 13  | –11      | 13  |      |
| Operating free-air temperature, $T_A$ |                             | 0        | 70  | –40      | 85  | –55      | 125 | °C   |

**TLE2161, TLE2161A, TLE2161B**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

**electrical characteristics at specified free-air temperature,  $V_{CC} \pm \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                              |                                                                    | TEST CONDITIONS                                         | T <sub>A</sub> <sup>†</sup> | TLE2161C, TLE2161AC<br>TLE2161BC |         |       | UNIT |
|----------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------|-----------------------------|----------------------------------|---------|-------|------|
|                                                                                        |                                                                    |                                                         |                             | MIN                              | TYP     | MAX   |      |
| V <sub>IO</sub> Input offset voltage                                                   | TLE2161C                                                           | V <sub>IC</sub> = 0,              R <sub>S</sub> = 50 Ω | 25°C                        | 0.8                              |         | 3.1   | mV   |
|                                                                                        | TLE2161AC                                                          |                                                         | Full range                  | 4                                |         |       |      |
|                                                                                        |                                                                    |                                                         | 25°C                        | 0.6                              |         | 2.6   |      |
|                                                                                        |                                                                    |                                                         | Full range                  | 3.5                              |         |       |      |
|                                                                                        |                                                                    |                                                         | 25°C                        | 0.5                              |         | 1.9   |      |
|                                                                                        | TLE2161BC                                                          |                                                         | Full range                  | 2.4                              |         |       |      |
| α <sub>VIO</sub> Temperature coefficient of input offset voltage                       |                                                                    |                                                         | Full range                  | 6                                |         | μV/°C |      |
| Input offset voltage long-term drift (see Note 4)                                      |                                                                    |                                                         | 25°C                        | 0.04                             |         | μV/mo |      |
| I <sub>IO</sub> Input offset current                                                   |                                                                    |                                                         | 25°C                        | 1                                |         | pA    |      |
|                                                                                        |                                                                    |                                                         | Full range                  | 0.8                              |         | nA    |      |
| I <sub>IB</sub> Input bias current                                                     |                                                                    | 25°C                                                    | 3                           |                                  | pA      |       |      |
|                                                                                        |                                                                    | Full range                                              | 2                           |                                  | nA      |       |      |
| V <sub>ICR</sub> Common-mode input voltage range                                       |                                                                    |                                                         | 25°C                        | −1.6 to 4                        | −2 to 6 | V     |      |
|                                                                                        |                                                                    |                                                         | Full range                  | −1.6 to 4                        |         | V     |      |
| V <sub>OM</sub> +      Maximum positive peak output voltage swing                      | R <sub>L</sub> = 10 kΩ                                             | 25°C                                                    | 3.5                         | 3.7                              |         | V     |      |
|                                                                                        |                                                                    | Full range                                              | 3.3                         |                                  |         |       |      |
|                                                                                        | R <sub>L</sub> = 100 Ω                                             | 25°C                                                    | 2.5                         | 3.1                              |         |       |      |
|                                                                                        |                                                                    | Full range                                              | 2                           |                                  |         |       |      |
| V <sub>OM</sub> −      Maximum negative peak output voltage swing                      | R <sub>L</sub> = 10 kΩ                                             | 25°C                                                    | −3.7                        | −3.9                             |         | V     |      |
|                                                                                        |                                                                    | Full range                                              | −3.3                        |                                  |         |       |      |
|                                                                                        | R <sub>L</sub> = 100 Ω                                             | 25°C                                                    | −2.5                        | −2.7                             |         |       |      |
|                                                                                        |                                                                    | Full range                                              | −2                          |                                  |         |       |      |
| A <sub>VD</sub> Large-signal differential voltage amplification                        | V <sub>O</sub> = ±2.8 V,      R <sub>L</sub> = 10 kΩ               | 25°C                                                    | 15                          | 80                               |         | V/mV  |      |
|                                                                                        |                                                                    | Full range                                              | 2                           |                                  |         |       |      |
|                                                                                        | V <sub>O</sub> = 0 to 2 V,      R <sub>L</sub> = 100 Ω             | 25°C                                                    | 0.75                        | 45                               |         |       |      |
|                                                                                        |                                                                    | Full range                                              | 0.5                         |                                  |         |       |      |
|                                                                                        | V <sub>O</sub> = 0 to −2 V,      R <sub>L</sub> = 100 Ω            | 25°C                                                    | 0.5                         | 3                                |         |       |      |
|                                                                                        |                                                                    | Full range                                              | 0.25                        |                                  |         |       |      |
| r <sub>i</sub> Input resistance                                                        |                                                                    |                                                         | 25°C                        | 10 <sup>12</sup>                 |         | Ω     |      |
| c <sub>i</sub> Input capacitance                                                       |                                                                    |                                                         | 25°C                        | 4                                |         | pF    |      |
| z <sub>O</sub> Open-loop output impedance                                              | I <sub>O</sub> = 0                                                 |                                                         | 25°C                        | 280                              |         | Ω     |      |
| CMRR      Common-mode rejection ratio                                                  | V <sub>IC</sub> = V <sub>ICRmin</sub> ,      R <sub>S</sub> = 50 Ω | 25°C                                                    | 65                          | 82                               |         | dB    |      |
|                                                                                        |                                                                    | Full range                                              | 65                          |                                  |         |       |      |
| k <sub>SVR</sub> Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>CC±</sub> = ±5 V to ±15 V,      R <sub>S</sub> = 50 Ω       | 25°C                                                    | 75                          | 93                               |         | dB    |      |
|                                                                                        |                                                                    | Full range                                              | 75                          |                                  |         |       |      |
| I <sub>CC</sub> Supply current                                                         | V <sub>O</sub> = 0,              No load                           | 25°C                                                    | 280                         |                                  | 325     | μA    |      |
|                                                                                        |                                                                    | Full range                                              | 350                         |                                  |         |       |      |
| ΔI <sub>CC</sub> Supply-current change over operating temperature range                |                                                                    |                                                         | Full range                  | 29                               |         | μA    |      |

$^\dagger$  Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



operating characteristics at specified free-air temperature,  $V_{CC} \pm = \pm 5$  V (unless otherwise noted)

| PARAMETER   |                                               | TEST CONDITIONS                                                            | $T_A^\dagger$ | TLE2161C, TLE2161AC<br>TLE2161BC |        |     | UNIT                   |
|-------------|-----------------------------------------------|----------------------------------------------------------------------------|---------------|----------------------------------|--------|-----|------------------------|
|             |                                               |                                                                            |               | MIN                              | TYP    | MAX |                        |
| SR          | Slew rate (see Figure 1)                      | $A_{VD} = 5$ ,<br>$R_L = 10$ k $\Omega$ ,<br>$C_L = 100$ pF                | 25°C          | 7                                | 10     |     | V/ $\mu$ s             |
|             |                                               |                                                                            | Full range    | 5                                |        |     |                        |
| $V_n$       | Equivalent input noise voltage (see Figure 2) | $R_S = 20$ $\Omega$ ,<br>$f = 10$ Hz                                       | 25°C          |                                  | 59     | 100 | nV/ $\sqrt{\text{Hz}}$ |
|             |                                               | $R_S = 20$ $\Omega$ ,<br>$f = 1$ kHz                                       |               |                                  | 43     | 60  |                        |
| $V_{n(PP)}$ | Peak-to-peak equivalent input noise voltage   | $f = 0.1$ Hz to 10 Hz                                                      | 25°C          |                                  | 1.1    |     | $\mu$ V                |
| $I_n$       | Equivalent input noise current                | $f = 1$ kHz                                                                | 25°C          |                                  | 1      |     | fA/ $\sqrt{\text{Hz}}$ |
| THD         | Total harmonic distortion                     | $V_{O(PP)} = 2$ V, $A_{VD} = 5$ ,<br>$R_L = 10$ k $\Omega$ , $f = 10$ kHz, | 25°C          |                                  | 0.025% |     |                        |
|             | Gain-bandwidth product (see Figure 3)         | $f = 100$ kHz, $R_L = 10$ k $\Omega$ ,<br>$C_L = 100$ pF                   | 25°C          |                                  | 5.8    |     | MHz                    |
|             |                                               | $f = 100$ kHz, $R_L = 100$ k $\Omega$ ,<br>$C_L = 100$ pF                  |               |                                  | 4.3    |     |                        |
| $t_s$       | Settling time                                 | $\epsilon = 0.1\%$                                                         | 25°C          |                                  | 5      |     | $\mu$ s                |
|             |                                               | $\epsilon = 0.01\%$                                                        |               |                                  | 10     |     |                        |
| $B_{OM}$    | Maximum output-swing bandwidth                | $A_{VD} = 5$ , $R_L = 10$ k $\Omega$                                       | 25°C          |                                  | 420    |     | kHz                    |
| $\phi_m$    | Phase margin (see Figure 3)                   | $A_{VD} = 5$ , $R_L = 10$ k $\Omega$ ,<br>$C_L = 100$ pF                   | 25°C          |                                  | 70°    |     |                        |
|             |                                               | $A_{VD} = 5$ , $R_L = 100$ $\Omega$ ,<br>$C_L = 100$ pF                    |               |                                  | 84°    |     |                        |

<sup>†</sup> Full range is 0°C to 70°C.

**TLE2161, TLE2161A, TLE2161B**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

**electrical characteristics at specified free-air temperature,  $V_{CC} \pm \pm 15\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                              |                                                                    | TEST CONDITIONS                                                 | T <sub>A</sub> <sup>†</sup> | TLE2161C, TLE2161AC<br>TLE2161BC |      |       | UNIT |
|----------------------------------------------------------------------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------|----------------------------------|------|-------|------|
|                                                                                        |                                                                    |                                                                 |                             | MIN                              | TYP  | MAX   |      |
| V <sub>IO</sub> Input offset voltage                                                   | TLE2161C                                                           | V <sub>IC</sub> = 0,                      R <sub>S</sub> = 50 Ω | 25°C                        | 0.6                              |      | 3     | mV   |
|                                                                                        | TLE2161AC                                                          |                                                                 | Full range                  | 3.9                              |      |       |      |
|                                                                                        |                                                                    |                                                                 | 25°C                        | 0.5                              |      | 1.5   |      |
|                                                                                        |                                                                    |                                                                 | Full range                  | 2.5                              |      |       |      |
|                                                                                        |                                                                    |                                                                 | 25°C                        | 0.3                              |      | 0.5   |      |
|                                                                                        | TLE2161BC                                                          |                                                                 | Full range                  | 1                                |      |       |      |
| α <sub>VIO</sub> Temperature coefficient of input offset voltage                       | V <sub>IC</sub> = 0,                      R <sub>S</sub> = 50 Ω    |                                                                 | Full range                  | 6                                |      | μV/°C |      |
| Input offset voltage long-term drift (see Note 4)                                      |                                                                    |                                                                 | 25°C                        | 0.04                             |      | μV/mo |      |
| I <sub>IO</sub> Input offset current                                                   |                                                                    |                                                                 | 25°C                        | 2                                |      | pA    |      |
|                                                                                        |                                                                    |                                                                 | Full range                  | 1                                |      | nA    |      |
| I <sub>IB</sub> Input bias current                                                     |                                                                    | 25°C                                                            | 4                           |                                  | pA   |       |      |
|                                                                                        |                                                                    | Full range                                                      | 3                           |                                  | nA   |       |      |
| V <sub>ICR</sub> Common-mode input voltage range                                       |                                                                    | 25°C                                                            | –11 to 13                   | –12 to 16                        | V    |       |      |
|                                                                                        |                                                                    | Full range                                                      | –11 to 13                   |                                  | V    |       |      |
| V <sub>OM</sub> +      Maximum positive peak output voltage swing                      | R <sub>L</sub> = 10 kΩ                                             | 25°C                                                            | 13.2                        | 13.7                             | V    |       |      |
|                                                                                        |                                                                    | Full range                                                      | 13                          |                                  |      |       |      |
|                                                                                        | R <sub>L</sub> = 600 Ω                                             | 25°C                                                            | 12.5                        | 13.2                             |      |       |      |
|                                                                                        |                                                                    | Full range                                                      | 12                          |                                  |      |       |      |
| V <sub>OM</sub> –      Maximum negative peak output voltage swing                      | R <sub>L</sub> = 10 kΩ                                             | 25°C                                                            | –13.2                       | –13.7                            | V    |       |      |
|                                                                                        |                                                                    | Full range                                                      | –13                         |                                  |      |       |      |
|                                                                                        | R <sub>L</sub> = 600 Ω                                             | 25°C                                                            | –12.5                       | –13                              |      |       |      |
|                                                                                        |                                                                    | Full range                                                      | –12                         |                                  |      |       |      |
| A <sub>VD</sub> Large-signal differential voltage amplification                        | V <sub>O</sub> = ±10 V,              R <sub>L</sub> = 10 kΩ        | 25°C                                                            | 30                          | 230                              | V/mV |       |      |
|                                                                                        |                                                                    | Full range                                                      | 20                          |                                  |      |       |      |
|                                                                                        | V <sub>O</sub> = 0 to 8 V,              R <sub>L</sub> = 600 Ω     | 25°C                                                            | 25                          | 100                              |      |       |      |
|                                                                                        |                                                                    | Full range                                                      | 10                          |                                  |      |       |      |
|                                                                                        | V <sub>O</sub> = 0 to –8 V,              R <sub>L</sub> = 600 Ω    | 25°C                                                            | 3                           | 25                               |      |       |      |
|                                                                                        |                                                                    | Full range                                                      | 1                           |                                  |      |       |      |
| r <sub>i</sub> Input resistance                                                        |                                                                    | 25°C                                                            | 10 <sup>12</sup>            |                                  | Ω    |       |      |
| c <sub>i</sub> Input capacitance                                                       |                                                                    | 25°C                                                            | 4                           |                                  | pF   |       |      |
| z <sub>o</sub> Open-loop output impedance                                              | I <sub>O</sub> = 0                                                 | 25°C                                                            | 280                         |                                  | Ω    |       |      |
| CMRR      Common-mode rejection ratio                                                  | V <sub>IC</sub> = V <sub>ICRmin</sub> ,      R <sub>S</sub> = 50 Ω | 25°C                                                            | 72                          | 90                               | dB   |       |      |
|                                                                                        |                                                                    | Full range                                                      | 70                          |                                  |      |       |      |
| k <sub>SVR</sub> Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>CC±</sub> = ±5 V to ±15 V,      R <sub>S</sub> = 50 Ω       | 25°C                                                            | 75                          | 93                               | dB   |       |      |
|                                                                                        |                                                                    | Full range                                                      | 75                          |                                  |      |       |      |
| I <sub>CC</sub> Supply current                                                         | V <sub>O</sub> = 0,                      No load                   | 25°C                                                            | 290                         | 350                              | μA   |       |      |
|                                                                                        |                                                                    | Full range                                                      | 375                         |                                  |      |       |      |
| ΔI <sub>CC</sub> Supply-current change over operating temperature range                |                                                                    |                                                                 | Full range                  | 34                               |      | μA    |      |

$^\dagger$  Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE2161, TLE2161A, TLE2161B**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**  
 SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)

| PARAMETER       |                                               | TEST CONDITIONS                                                                           | $T_A^\dagger$ | TLE2161C, TLE2161AC<br>TLE2161BC |        |     | UNIT                   |
|-----------------|-----------------------------------------------|-------------------------------------------------------------------------------------------|---------------|----------------------------------|--------|-----|------------------------|
|                 |                                               |                                                                                           |               | MIN                              | TYP    | MAX |                        |
| SR              | Slew rate (see Figure 1)                      | $A_{VD} = 5$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                          | 25°C          | 7                                | 10     |     | V/ $\mu$ s             |
|                 |                                               |                                                                                           | Full range    | 5                                |        |     |                        |
| $V_n$           | Equivalent input noise voltage (see Figure 2) | $R_S = 20\text{ }\Omega$ , $f = 10\text{ Hz}$                                             | 25°C          |                                  | 70     | 100 | nV/ $\sqrt{\text{Hz}}$ |
|                 |                                               | $R_S = 20\text{ }\Omega$ , $f = 1\text{ kHz}$                                             |               |                                  | 40     | 60  |                        |
| $V_{n(PP)}$     | Peak-to-peak equivalent input noise voltage   | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                       | 25°C          |                                  | 1.1    |     | $\mu$ V                |
| $I_n$           | Equivalent input noise current                | $f = 1\text{ kHz}$                                                                        | 25°C          |                                  | 1.1    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD             | Total harmonic distortion                     | $V_{O(PP)} = 2\text{ V}$ , $A_{VD} = 5$ , $f = 10\text{ kHz}$ , $R_L = 10\text{ k}\Omega$ | 25°C          |                                  | 0.025% |     |                        |
|                 | Gain-bandwidth product (see Figure 3)         | $f = 100\text{ kHz}$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                  | 25°C          |                                  | 6.4    |     | MHz                    |
|                 |                                               | $f = 100\text{ kHz}$ , $R_L = 600\text{ }\Omega$ , $C_L = 100\text{ pF}$                  |               |                                  | 5.6    |     |                        |
| $t_s$           | Settling time                                 | $\epsilon = 0.1\%$                                                                        | 25°C          |                                  | 5      |     | $\mu$ s                |
|                 |                                               | $\epsilon = 0.01\%$                                                                       |               |                                  | 10     |     |                        |
| B <sub>OM</sub> | Maximum output-swing bandwidth                | $A_{VD} = 5$ , $R_L = 10\text{ k}\Omega$                                                  | 25°C          |                                  | 116    |     | kHz                    |
| $\phi_m$        | Phase margin (see Figure 3)                   | $A_{VD} = 5$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                          | 25°C          |                                  | 72°    |     |                        |
|                 |                                               | $A_{VD} = 5$ , $R_L = 600\text{ }\Omega$ , $C_L = 100\text{ pF}$                          |               |                                  | 78°    |     |                        |

<sup>†</sup> Full range is 0°C to 70°C.

**TLE2161, TLE2161A, TLE2161B**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

**electrical characteristics at specified free-air temperature,  $V_{CC} \pm = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                              |                                                                 | TEST CONDITIONS                                                 | T <sub>A</sub> <sup>†</sup> | TLE2161I, TLE2161AI<br>TLE2161BI |      |       | UNIT |
|----------------------------------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------|----------------------------------|------|-------|------|
|                                                                                        |                                                                 |                                                                 |                             | MIN                              | TYP  | MAX   |      |
| V <sub>IO</sub> Input offset voltage                                                   | TLE2161I                                                        | V <sub>IC</sub> = 0,                      R <sub>S</sub> = 50 Ω | 25°C                        | 0.8    3.1                       |      | mV    |      |
|                                                                                        |                                                                 |                                                                 | Full range                  | 4.4                              |      |       |      |
|                                                                                        | TLE2161AI                                                       |                                                                 | 25°C                        | 0.6    2.6                       |      |       |      |
|                                                                                        |                                                                 |                                                                 | Full range                  | 3.9                              |      |       |      |
|                                                                                        | TLE2161BI                                                       |                                                                 | 25°C                        | 0.5    1.9                       |      |       |      |
|                                                                                        |                                                                 |                                                                 | Full range                  | 2.7                              |      |       |      |
| αV <sub>IO</sub> Temperature coefficient of input offset voltage                       |                                                                 |                                                                 | Full range                  | 6                                |      | μV/°C |      |
| Input offset voltage long-term drift (see Note 4)                                      |                                                                 |                                                                 | 25°C                        | 0.04                             |      | μV/mo |      |
| I <sub>IO</sub> Input offset current                                                   |                                                                 |                                                                 | 25°C                        | 1                                |      | pA    |      |
|                                                                                        |                                                                 |                                                                 | Full range                  | 2                                |      | nA    |      |
| I <sub>IB</sub> Input bias current                                                     |                                                                 |                                                                 | 25°C                        | 3                                |      | pA    |      |
|                                                                                        |                                                                 |                                                                 | Full range                  | 4                                |      | nA    |      |
| V <sub>ICR</sub> Common-mode input voltage range                                       |                                                                 | 25°C                                                            | −1.6 to 4                   | −2 to 6                          | V    |       |      |
|                                                                                        |                                                                 | Full range                                                      | −1.6 to 4                   |                                  |      |       |      |
| V <sub>OM</sub> +      Maximum positive peak output voltage                            | R <sub>L</sub> = 10 kΩ                                          | 25°C                                                            | 3.5                         | 3.7                              | V    |       |      |
|                                                                                        |                                                                 | Full range                                                      | 3.1                         |                                  |      |       |      |
|                                                                                        | R <sub>L</sub> = 100 Ω                                          | 25°C                                                            | 2.5                         | 3.1                              |      |       |      |
|                                                                                        |                                                                 | Full range                                                      | 2                           |                                  |      |       |      |
| V <sub>OM</sub> −      Maximum negative peak output voltage swing                      | R <sub>L</sub> = 10 kΩ                                          | 25°C                                                            | −3.7                        | −3.9                             | V    |       |      |
|                                                                                        |                                                                 | Full range                                                      | −3.1                        |                                  |      |       |      |
|                                                                                        | R <sub>L</sub> = 100 Ω                                          | 25°C                                                            | −2.5                        | −2.7                             |      |       |      |
|                                                                                        |                                                                 | Full range                                                      | −2                          |                                  |      |       |      |
| A <sub>VD</sub> Large-signal differential voltage amplification                        | V <sub>O</sub> = ±2.8 V,    R <sub>L</sub> = 10 kΩ              | 25°C                                                            | 15                          | 80                               | V/mV |       |      |
|                                                                                        |                                                                 | Full range                                                      | 2                           |                                  |      |       |      |
|                                                                                        | V <sub>O</sub> = 0 to 2 V,    R <sub>L</sub> = 100 Ω            | 25°C                                                            | 0.75                        | 45                               |      |       |      |
|                                                                                        |                                                                 | Full range                                                      | 0.5                         |                                  |      |       |      |
|                                                                                        | V <sub>O</sub> = 0 to −2 V,    R <sub>L</sub> = 100 Ω           | 25°C                                                            | 0.5                         | 3                                |      |       |      |
|                                                                                        |                                                                 | Full range                                                      | 0.25                        |                                  |      |       |      |
| r <sub>i</sub> Input resistance                                                        |                                                                 | 25°C                                                            | 10 <sup>12</sup>            |                                  | Ω    |       |      |
| c <sub>i</sub> Input capacitance                                                       |                                                                 | 25°C                                                            | 4                           |                                  | pF   |       |      |
| z <sub>O</sub> Open-loop output impedance                                              | I <sub>O</sub> = 0                                              | 25°C                                                            | 280                         |                                  | Ω    |       |      |
| CMRR      Common-mode rejection ratio                                                  | V <sub>IC</sub> =V <sub>ICRmin</sub> ,    R <sub>S</sub> = 50 Ω | 25°C                                                            | 65                          | 82                               | dB   |       |      |
|                                                                                        |                                                                 | Full range                                                      | 65                          |                                  |      |       |      |
| k <sub>SVR</sub> Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>CC±</sub> = ±5 V to ± 15 V,    R <sub>S</sub> = 50 Ω     | 25°C                                                            | 75                          | 93                               | dB   |       |      |
|                                                                                        |                                                                 | Full range                                                      | 65                          |                                  |      |       |      |
| I <sub>CC</sub> Supply current                                                         | V <sub>O</sub> = 0,                      No load                | 25°C                                                            | 280                         | 325                              | μA   |       |      |
|                                                                                        |                                                                 | Full range                                                      | 350                         |                                  |      |       |      |
| ΔI <sub>CC</sub> Supply-current change over operating temperature range                |                                                                 |                                                                 | Full range                  | 29                               |      | μA    |      |

<sup>†</sup> Full range is –40°C to 85°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



operating characteristics at specified free-air temperature,  $V_{CC} \pm = \pm 5\text{ V}$  (unless otherwise noted)

| PARAMETER   |                                               | TEST CONDITIONS                                                                           | $T_A^\dagger$ | TLE2161, TLE2161AI<br>TLE2161BI |        |     | UNIT                   |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------------|---------------|---------------------------------|--------|-----|------------------------|
|             |                                               |                                                                                           |               | MIN                             | TYP    | MAX |                        |
| SR          | Slew rate (see Figure 1)                      | $A_{VD} = 5$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                          | 25°C          | 7                               | 10     |     | V/ $\mu\text{s}$       |
|             |                                               |                                                                                           | Full range    | 5                               |        |     |                        |
| $V_n$       | Equivalent input noise voltage (see Figure 2) | $R_S = 20\text{ }\Omega$ , $f = 10\text{ Hz}$                                             | 25°C          |                                 | 59     | 100 | nV/ $\sqrt{\text{Hz}}$ |
|             |                                               | $R_S = 20\text{ }\Omega$ , $f = 1\text{ kHz}$                                             |               |                                 | 43     | 60  |                        |
| $V_{n(PP)}$ | Peak-to-peak equivalent input noise voltage   | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                       | 25°C          |                                 | 1.1    |     | $\mu\text{V}$          |
| $I_n$       | Equivalent input noise current                | $f = 1\text{ kHz}$                                                                        | 25°C          |                                 | 1      |     | fA/ $\sqrt{\text{Hz}}$ |
| THD         | Total harmonic distortion                     | $V_{O(PP)} = 2\text{ V}$ , $A_{VD} = 5$ , $f = 10\text{ kHz}$ , $R_L = 10\text{ k}\Omega$ | 25°C          |                                 | 0.025% |     |                        |
|             | Gain-bandwidth product (see Figure 3)         | $f = 100\text{ kHz}$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                  | 25°C          |                                 | 5.8    |     | MHz                    |
|             |                                               | $f = 100\text{ kHz}$ , $R_L = 100\text{ }\Omega$ , $C_L = 100\text{ pF}$                  |               |                                 | 4.3    |     |                        |
| $t_s$       | Settling time                                 | $\epsilon = 0.1\%$                                                                        | 25°C          |                                 | 5      |     | $\mu\text{s}$          |
|             |                                               | $\epsilon = 0.01\%$                                                                       |               |                                 | 10     |     |                        |
| $B_{OM}$    | Maximum output-swing bandwidth                | $A_{VD} = 5$ , $R_L = 10\text{ k}\Omega$                                                  | 25°C          |                                 | 420    |     | kHz                    |
| $\phi_m$    | Phase margin (see Figure 3)                   | $A_{VD} = 5$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                          | 25°C          |                                 | 70°    |     |                        |
|             |                                               | $A_{VD} = 5$ , $R_L = 100\text{ }\Omega$ , $C_L = 100\text{ pF}$                          |               |                                 | 84°    |     |                        |

<sup>†</sup> Full range is –40°C to 85°C.

**TLE2161, TLE2161A, TLE2161B**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**  
SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

**electrical characteristics at specified free-air temperature,  $V_{CC} \pm \pm 15\text{ V}$  (unless otherwise noted)**

| PARAMETER                                         |                                                                       | TEST CONDITIONS                                                 | T <sub>A</sub> <sup>†</sup> | TLE2161I, TLE2161AI<br>TLE2161BI |       |       | UNIT |
|---------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------|----------------------------------|-------|-------|------|
|                                                   |                                                                       |                                                                 |                             | MIN                              | TYP   | MAX   |      |
| V <sub>IO</sub>                                   | Input offset voltage                                                  | V <sub>IC</sub> = 0,      R <sub>S</sub> = 50 Ω                 | 25°C                        | 0.6      3                       |       | mV    |      |
|                                                   |                                                                       |                                                                 | Full range                  | 4.3                              |       |       |      |
|                                                   |                                                                       |                                                                 | 25°C                        | 0.5      1.5                     |       |       |      |
|                                                   |                                                                       |                                                                 | Full range                  | 2.9                              |       |       |      |
| α <sub>VIO</sub>                                  | Temperature coefficient of input offset voltage                       |                                                                 | 25°C                        | 0.3      0.5                     |       | μV/°C |      |
|                                                   |                                                                       |                                                                 | Full range                  | 1.3                              |       |       |      |
|                                                   |                                                                       |                                                                 | Full range                  | 6                                |       |       |      |
|                                                   |                                                                       |                                                                 | 25°C                        | 0.04                             |       |       |      |
| Input offset voltage long-term drift (see Note 4) |                                                                       |                                                                 | 25°C                        | 0.04                             |       | μV/mo |      |
| I <sub>IO</sub>                                   | Input offset current                                                  |                                                                 | 25°C                        | 2                                |       | pA    |      |
| I <sub>IB</sub>                                   | Input bias current                                                    |                                                                 | Full range                  | 3                                |       | nA    |      |
|                                                   |                                                                       |                                                                 | 25°C                        | 4                                |       | pA    |      |
|                                                   |                                                                       | Full range                                                      | 5                           |                                  | nA    |       |      |
| V <sub>ICR</sub>                                  | Common-mode input voltage range                                       | 25°C                                                            | –11 to 13                   | –12 to 16                        | V     |       |      |
|                                                   |                                                                       | Full range                                                      | –11 to 13                   |                                  | V     |       |      |
| V <sub>OM</sub> +                                 | Maximum positive peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                          | 25°C                        | 13.2                             | 13.7  | V     |      |
|                                                   |                                                                       |                                                                 | Full range                  | 13                               |       |       |      |
|                                                   |                                                                       | R <sub>L</sub> = 600 Ω                                          | 25°C                        | 12.5                             | 13.2  |       |      |
|                                                   |                                                                       |                                                                 | Full range                  | 12                               |       |       |      |
| V <sub>OM</sub> –                                 | Maximum negative peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                          | 25°C                        | –13.2                            | –13.7 | V     |      |
|                                                   |                                                                       |                                                                 | Full range                  | –13                              |       |       |      |
|                                                   |                                                                       | R <sub>L</sub> = 600 Ω                                          | 25°C                        | –12.5                            | –13   |       |      |
|                                                   |                                                                       |                                                                 | Full range                  | –12                              |       |       |      |
| A <sub>VD</sub>                                   | Large-signal differential voltage amplification                       | V <sub>O</sub> = ±10 V,      R <sub>L</sub> = 10 kΩ             | 25°C                        | 30                               | 230   | V/mV  |      |
|                                                   |                                                                       |                                                                 | Full range                  | 20                               |       |       |      |
|                                                   |                                                                       | V <sub>O</sub> = 0 to 8 V,      R <sub>L</sub> = 600 Ω          | 25°C                        | 25                               | 100   |       |      |
|                                                   |                                                                       |                                                                 | Full range                  | 10                               |       |       |      |
|                                                   |                                                                       | V <sub>O</sub> = 0 to – 8 V,      R <sub>L</sub> = 600 Ω        | 25°C                        | 3                                | 25    |       |      |
|                                                   |                                                                       |                                                                 | Full range                  | 1                                |       |       |      |
| r <sub>i</sub>                                    | Input resistance                                                      |                                                                 | 25°C                        | 10 <sup>12</sup>                 |       | Ω     |      |
| c <sub>i</sub>                                    | Input capacitance                                                     |                                                                 | 25°C                        | 4                                |       | pF    |      |
| z <sub>O</sub>                                    | Open-loop output impedance                                            | I <sub>O</sub> = 0                                              | 25°C                        | 280                              |       | Ω     |      |
| CMRR                                              | Common-mode rejection ratio                                           | V <sub>IC</sub> =V <sub>ICRmin</sub> ,    R <sub>S</sub> = 50 Ω | 25°C                        | 72                               | 90    | dB    |      |
|                                                   |                                                                       |                                                                 | Full range                  | 65                               |       |       |      |
| k <sub>SVR</sub>                                  | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>CC±</sub> = ±5 V to ±15 V,    R <sub>S</sub> = 50 Ω      | 25°C                        | 75                               | 93    | dB    |      |
|                                                   |                                                                       |                                                                 | Full range                  | 65                               |       |       |      |
| I <sub>CC</sub>                                   | Supply current                                                        | V <sub>O</sub> = 0,      No load                                | 25°C                        | 290                              | 350   | μA    |      |
|                                                   |                                                                       |                                                                 | Full range                  | 375                              |       |       |      |
| ΔI <sub>CC</sub>                                  | Supply-current change over operating temperature range                |                                                                 | Full range                  | 34                               |       | μA    |      |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



operating characteristics at specified free-air temperature,  $V_{CC} \pm = \pm 15$  V (unless otherwise noted)

| PARAMETER   |                                               | TEST CONDITIONS                                                       | $T_A^\dagger$ | TLE2161, TLE2161A<br>TLE2161B |        |     | UNIT                   |
|-------------|-----------------------------------------------|-----------------------------------------------------------------------|---------------|-------------------------------|--------|-----|------------------------|
|             |                                               |                                                                       |               | MIN                           | TYP    | MAX |                        |
| SR          | Slew rate (see Figure 1)                      | $A_{VD} = 5$ , $R_L = 10$ k $\Omega$ , $C_L = 100$ pF                 | 25°C          | 7                             | 10     |     | V/ $\mu$ s             |
|             |                                               |                                                                       | Full range    | 5                             |        |     |                        |
| $V_n$       | Equivalent input noise voltage (see Figure 2) | $R_S = 20$ $\Omega$ , $f = 10$ Hz                                     | 25°C          |                               | 70     | 100 | nV/ $\sqrt{\text{Hz}}$ |
|             |                                               | $R_S = 20$ $\Omega$ , $f = 1$ kHz                                     |               |                               | 40     | 60  |                        |
| $V_{n(PP)}$ | Peak-to-peak equivalent input noise voltage   | $f = 0.1$ Hz to 10 Hz                                                 | 25°C          |                               | 1.1    |     | $\mu$ V                |
| $I_n$       | Equivalent input noise current                | $f = 1$ kHz                                                           | 25°C          |                               | 1.1    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD         | Total harmonic distortion                     | $V_{O(PP)} = 2$ V, $A_{VD} = 5$ , $f = 10$ kHz, $R_L = 10$ k $\Omega$ | 25°C          |                               | 0.025% |     |                        |
|             | Gain-bandwidth product (see Figure 3)         | $f = 100$ kHz, $R_L = 10$ k $\Omega$ , $C_L = 100$ pF                 | 25°C          |                               | 6.4    |     | MHz                    |
|             |                                               | $f = 100$ kHz, $R_L = 600$ $\Omega$ , $C_L = 100$ pF                  |               |                               | 5.6    |     |                        |
| $t_s$       | Settling time                                 | $\epsilon = 0.1\%$                                                    | 25°C          |                               | 5      |     | $\mu$ s                |
|             |                                               | $\epsilon = 0.01\%$                                                   |               |                               | 10     |     |                        |
| $B_{OM}$    | Maximum output-swing bandwidth                | $A_{VD} = 5$ , $R_L = 10$ k $\Omega$                                  | 25°C          |                               | 116    |     | kHz                    |
| $\phi_m$    | Phase margin (see Figure 3)                   | $A_{VD} = 5$ , $R_L = 10$ k $\Omega$ , $C_L = 100$ pF                 | 25°C          |                               | 72°    |     |                        |
|             |                                               | $A_{VD} = 5$ , $R_L = 600$ $\Omega$ , $C_L = 100$ pF                  |               |                               | 78°    |     |                        |

$^\dagger$  Full range is – 40°C to 85°C.

**TLE2161, TLE2161A, TLE2161B**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

**electrical characteristics at specified free-air temperature,  $V_{CC} \pm \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                         |                                                 | TEST CONDITIONS                                 | T <sub>A</sub> <sup>†</sup> | TLE2161M<br>TLE2161AM<br>TLE2161BM |         | UNIT  |     |
|---------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-----------------------------|------------------------------------|---------|-------|-----|
|                                                   |                                                 |                                                 |                             | MIN                                | TYP     |       | MAX |
| V <sub>IO</sub>                                   | Input offset voltage                            | TLE2161M                                        | 25°C                        | 0.8                                | 3.1     | mV    |     |
|                                                   |                                                 |                                                 | Full range                  | 6                                  |         |       |     |
|                                                   |                                                 |                                                 | TLE2161AM                   | 25°C                               | 0.6     |       | 2.6 |
|                                                   |                                                 |                                                 |                             | Full range                         | 4.6     |       |     |
|                                                   |                                                 |                                                 | TLE2161BM                   | 25°C                               | 0.5     |       | 1.9 |
|                                                   |                                                 |                                                 |                             | Full range                         | 3.1     |       |     |
| αV <sub>IO</sub>                                  | Temperature coefficient of input offset voltage | V <sub>IC</sub> = 0,      R <sub>S</sub> = 50 Ω | Full range                  | 6                                  |         | μV/°C |     |
| Input offset voltage long-term drift (see Note 4) |                                                 |                                                 | 25°C                        | 0.04                               |         | μV/mo |     |
| I <sub>IO</sub>                                   | Input offset current                            |                                                 | 25°C                        | 1                                  |         | pA    |     |
|                                                   |                                                 |                                                 | Full range                  | 15                                 |         | nA    |     |
| I <sub>IB</sub>                                   | Input bias current                              |                                                 | 25°C                        | 3                                  |         | pA    |     |
|                                                   |                                                 |                                                 | Full range                  | 30                                 |         | nA    |     |
| V <sub>ICR</sub>                                  | Common-mode input voltage range                 |                                                 | 25°C                        | −1.6 to 4                          | −2 to 6 | V     |     |
|                                                   |                                                 |                                                 | Full range                  | −1.6 to 4                          |         | V     |     |
| V <sub>OM</sub> +                                 | Maximum positive peak output voltage swing      | All packages                                    | 25°C                        | 3.5                                | 3.7     | V     |     |
|                                                   |                                                 |                                                 | Full range                  | 3                                  |         |       |     |
|                                                   |                                                 | FK and JG packages                              | 25°C                        | 2.5                                | 3.6     | V     |     |
|                                                   |                                                 |                                                 | Full range                  | 2                                  |         |       |     |
|                                                   |                                                 | D and P packages                                | 25°C                        | 2.5                                | 3.1     |       |     |
|                                                   |                                                 |                                                 | Full range                  | 2                                  |         |       |     |
| V <sub>OM</sub> −                                 | Maximum negative peak output voltage swing      | All packages                                    | 25°C                        | −3.7                               | −3.9    | V     |     |
|                                                   |                                                 |                                                 | Full range                  | −3                                 |         |       |     |
|                                                   |                                                 | FK and JG packages                              | 25°C                        | −2.5                               | −3.5    |       |     |
|                                                   |                                                 |                                                 | Full range                  | −2                                 |         |       |     |
|                                                   |                                                 | D and P packages                                | 25°C                        | −2.5                               | −2.7    |       |     |
|                                                   |                                                 |                                                 | Full range                  | −2                                 |         |       |     |
| A <sub>VD</sub>                                   | Large-signal differential voltage amplification | All packages                                    | 25°C                        | 15                                 | 80      | V/mV  |     |
|                                                   |                                                 |                                                 | Full range                  | 2                                  |         |       |     |
|                                                   |                                                 | FK and JG packages                              | 25°C                        | 1                                  | 65      |       |     |
|                                                   |                                                 |                                                 | Full range                  | 0.5                                |         |       |     |
|                                                   |                                                 |                                                 | 25°C                        | 1                                  | 16      |       |     |
|                                                   |                                                 |                                                 | Full range                  | 0.5                                |         |       |     |
|                                                   |                                                 | D and P packages                                | 25°C                        | 0.75                               | 45      |       |     |
|                                                   |                                                 |                                                 | Full range                  | 0.5                                |         |       |     |
|                                                   |                                                 |                                                 | 25°C                        | 0.5                                | 3       |       |     |
|                                                   |                                                 |                                                 | Full range                  | 0.25                               |         |       |     |

$^\dagger$  Full range is  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ .

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**electrical characteristics at specified free-air temperature,  $V_{CC} \pm = \pm 5$  V (unless otherwise noted continued)**

| PARAMETER                                                                     | TEST CONDITIONS                                           | $T_A^\dagger$ | TLE2161M<br>TLE2161AM<br>TLE2161BM |                  |     | UNIT |
|-------------------------------------------------------------------------------|-----------------------------------------------------------|---------------|------------------------------------|------------------|-----|------|
|                                                                               |                                                           |               | MIN                                | TYP              | MAX |      |
| $r_i$ Input resistance                                                        |                                                           | 25°C          |                                    | 10 <sup>12</sup> |     | Ω    |
| $c_i$ Input capacitance                                                       |                                                           | 25°C          |                                    | 4                |     | pF   |
| $z_o$ Open-loop output impedance                                              | $I_O = 0$                                                 | 25°C          |                                    | 280              |     | Ω    |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}, R_S = 50 \Omega$                    | 25°C          | 65                                 | 82               |     | dB   |
|                                                                               |                                                           | Full range    | 60                                 |                  |     |      |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5$ V to $\pm 15$ V,<br>$R_S = 50 \Omega$ | 25°C          | 75                                 | 93               |     | dB   |
|                                                                               |                                                           | Full range    | 65                                 |                  |     |      |
| $I_{CC}$ Supply current                                                       | $V_O = 0,$ No load                                        | 25°C          |                                    | 280              | 325 | μA   |
|                                                                               |                                                           | Full range    |                                    |                  | 350 |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range        |                                                           | Full range    |                                    | 39               |     | μA   |

<sup>†</sup> Full range is –55°C to 125°C.

**operating characteristics,  $V_{CC} \pm = \pm 5$  V,  $T_A = 25^\circ\text{C}$**

| PARAMETER                                               | TEST CONDITIONS                                                                     | TLE2161M<br>TLE2161AM<br>TLE2161BM |        |     | UNIT   |
|---------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------|--------|-----|--------|
|                                                         |                                                                                     | MIN                                | TYP    | MAX |        |
| SR Slew rate (see Figure 1)                             | $A_{VD} = 5, R_L = 10 \text{ k}\Omega, C_L = 100 \text{ pF}$                        |                                    | 10     |     | V/μs   |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $R_S = 20 \Omega, f = 10 \text{ Hz}$                                                |                                    | 59     |     | nV/√Hz |
|                                                         | $R_S = 20 \Omega, f = 1 \text{ kHz}$                                                |                                    | 43     |     |        |
| $V_{n(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1 \text{ Hz to } 10 \text{ Hz}$                                              |                                    | 1.1    |     | μV     |
| $I_n$ Equivalent input noise current                    | $f = 1 \text{ kHz}$                                                                 |                                    | 1      |     | fA/√Hz |
| THD Total harmonic distortion                           | $A_{VD} = 5, V_{O(PP)} = 2 \text{ V}, f = 10 \text{ kHz}, R_L = 10 \text{ k}\Omega$ |                                    | 0.025% |     |        |
| Gain-bandwidth product (see Figure 3)                   | $f = 100 \text{ kHz}, R_L = 10 \text{ k}\Omega, C_L = 100 \text{ pF}$               |                                    | 5.8    |     | MHz    |
|                                                         | $f = 100 \text{ kHz}, R_L = 600 \text{ k}\Omega, C_L = 100 \text{ pF}$              |                                    | 4.3    |     |        |
| $t_s$ Settling time                                     | $\epsilon = 0.1\%$                                                                  |                                    | 5      |     | μs     |
|                                                         | $\epsilon = 0.01\%$                                                                 |                                    | 10     |     |        |
| BOM Maximum output-swing bandwidth                      | $A_{VD} = 5, R_L = 10 \text{ k}\Omega$                                              |                                    | 420    |     | kHz    |
| $\phi_m$ Phase margin (see Figure 3)                    | $A_{VD} = 5, R_L = 10 \text{ k}\Omega, C_L = 100 \text{ pF}$                        |                                    | 70°    |     |        |
|                                                         | $A_{VD} = 5, R_L = 600 \Omega, C_L = 100 \text{ pF}$                                |                                    | 84°    |     |        |

**TLE2161, TLE2161A, TLE2161B**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

**electrical characteristics at specified free-air temperature,  $V_{CC} \pm = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                         |                                                                       | TEST CONDITIONS                                                    | T <sub>A</sub> <sup>†</sup> | TLE2161M<br>TLE2161AM<br>TLE2161BM |           |       | UNIT |
|---------------------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------|-----------------------------|------------------------------------|-----------|-------|------|
|                                                   |                                                                       |                                                                    |                             | MIN                                | TYP       | MAX   |      |
| V <sub>IO</sub>                                   | Input offset voltage                                                  | TLE2161M                                                           | 25°C                        | 0.6                                | 3         | mV    |      |
|                                                   |                                                                       |                                                                    | Full range                  | 6                                  |           |       |      |
|                                                   |                                                                       |                                                                    | TLE2161AM                   | 25°C                               | 0.5       |       | 1.5  |
|                                                   |                                                                       |                                                                    |                             | Full range                         | 3.6       |       |      |
|                                                   |                                                                       |                                                                    | TLE2161BM                   | 25°C                               | 0.3       |       | 0.5  |
|                                                   |                                                                       |                                                                    |                             | Full range                         | 1.7       |       |      |
| α <sub>VIO</sub>                                  | Temperature coefficient of input offset voltage                       | V <sub>IC</sub> = 0,      R <sub>S</sub> = 50 Ω                    | Full range                  | 6                                  |           | μV/°C |      |
| Input offset voltage long-term drift (see Note 4) |                                                                       |                                                                    | 25°C                        | 0.04                               |           | μV/mo |      |
| I <sub>IO</sub>                                   | Input offset current                                                  |                                                                    | 25°C                        | 2                                  |           | pA    |      |
|                                                   |                                                                       |                                                                    | Full range                  | 20                                 |           | nA    |      |
| I <sub>IB</sub>                                   | Input bias current                                                    |                                                                    | 25°C                        | 4                                  |           | pA    |      |
|                                                   |                                                                       |                                                                    | Full range                  | 40                                 |           | nA    |      |
| V <sub>ICR</sub>                                  | Common-mode input voltage range                                       |                                                                    | 25°C                        | −11 to 13                          | −12 to 16 | V     |      |
|                                                   |                                                                       |                                                                    | Full range                  | −11 to 13                          |           | V     |      |
| V <sub>OM</sub> +                                 | Maximum positive peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                             | 25°C                        | 13.2                               | 13.7      | V     |      |
|                                                   |                                                                       |                                                                    | Full range                  | 12.5                               |           |       |      |
|                                                   |                                                                       | R <sub>L</sub> = 600 Ω                                             | 25°C                        | 12.5                               | 13.2      |       |      |
|                                                   |                                                                       |                                                                    | Full range                  | 12                                 |           |       |      |
| V <sub>OM</sub> −                                 | Maximum negative peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                             | 25°C                        | −13.2                              | −13.7     | V     |      |
|                                                   |                                                                       |                                                                    | Full range                  | −12.5                              |           |       |      |
|                                                   |                                                                       | R <sub>L</sub> = 600 Ω                                             | 25°C                        | −12.5                              | −13       |       |      |
|                                                   |                                                                       |                                                                    | Full range                  | −12                                |           |       |      |
| A <sub>VD</sub>                                   | Large-signal differential voltage amplification                       | V <sub>O</sub> = ±10 V,      R <sub>L</sub> = 10 kΩ                | 25°C                        | 30                                 | 230       | V/mV  |      |
|                                                   |                                                                       |                                                                    | Full range                  | 20                                 |           |       |      |
|                                                   |                                                                       | V <sub>O</sub> = 0 to 8 V,      R <sub>L</sub> = 600 Ω             | 25°C                        | 25                                 | 100       |       |      |
|                                                   |                                                                       |                                                                    | Full range                  | 7                                  |           |       |      |
|                                                   |                                                                       | V <sub>O</sub> = 0 to − 8 V,      R <sub>L</sub> = 600 Ω           | 25°C                        | 3                                  | 25        |       |      |
|                                                   |                                                                       |                                                                    | Full range                  | 1                                  |           |       |      |
| r <sub>i</sub>                                    | Input resistance                                                      |                                                                    | 25°C                        | 10 <sup>12</sup>                   |           | Ω     |      |
| c <sub>i</sub>                                    | Input capacitance                                                     |                                                                    | 25°C                        | 4                                  |           | pF    |      |
| z <sub>o</sub>                                    | Open-loop output impedance                                            | I <sub>O</sub> = 0                                                 | 25°C                        | 280                                |           | Ω     |      |
| CMRR                                              | Common-mode rejection ratio                                           | V <sub>IC</sub> = V <sub>ICRmin</sub> ,      R <sub>S</sub> = 50 Ω | 25°C                        | 72                                 | 90        | dB    |      |
|                                                   |                                                                       |                                                                    | Full range                  | 65                                 |           |       |      |
| k <sub>SVR</sub>                                  | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>CC±</sub> = ±5 V to ±15 V,      R <sub>S</sub> = 50 Ω       | 25°C                        | 75                                 | 93        | dB    |      |
|                                                   |                                                                       |                                                                    | Full range                  | 65                                 |           |       |      |
| I <sub>CC</sub>                                   | Supply current                                                        | V <sub>O</sub> = 0,      No load                                   | 25°C                        | 290                                | 350       | μA    |      |
|                                                   |                                                                       |                                                                    | Full range                  | 375                                |           |       |      |
| ΔI <sub>CC</sub>                                  | Supply-current change over operating temperature range                |                                                                    |                             | Full range                         | 46        |       | μA   |

<sup>†</sup> Full range is –55°C to 125°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.




operating characteristics at specified free-air temperature,  $V_{CC} \pm \pm 15$  V (unless otherwise noted)

| PARAMETER                                               | TEST CONDITIONS                                                                                       | $T_A^\dagger$ | TLE2161M<br>TLE2161AM<br>TLE2161BM |        |     | UNIT                   |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------|------------------------------------|--------|-----|------------------------|
|                                                         |                                                                                                       |               | MIN                                | TYP    | MAX |                        |
| SR      Slew rate (see Figure 1)                        | $A_{VD} = 5, \quad R_L = 10 \text{ k}\Omega, \quad C_L = 100 \text{ pF}$                              | 25°C          | 7                                  | 10     |     | V/ $\mu$ s             |
|                                                         |                                                                                                       | Full range    | 5                                  |        |     |                        |
| $V_n$ Equivalent input noise voltage<br>(see Figure 2)  | $R_S = 20 \text{ }\Omega, \quad f = 10 \text{ Hz}$                                                    | 25°C          |                                    | 70     |     | nV/ $\sqrt{\text{Hz}}$ |
|                                                         | $R_S = 20 \text{ }\Omega, \quad f = 1 \text{ kHz}$                                                    |               |                                    | 40     |     |                        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1 \text{ Hz to } 10 \text{ Hz}$                                                                | 25°C          |                                    | 1.1    |     | $\mu$ V                |
| $I_n$ Equivalent input noise current                    | $f = 1 \text{ Hz}$                                                                                    | 25°C          |                                    | 1.1    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD      Total harmonic distortion                      | $V_{O(PP)} = 2 \text{ V}, \quad A_{VD} = 5, \quad f = 10 \text{ kHz}, \quad R_L = 10 \text{ k}\Omega$ | 25°C          |                                    | 0.025% |     |                        |
| Gain-bandwidth product<br>(see Figure 3)                | $f = 100 \text{ kHz}, \quad R_L = 10 \text{ k}\Omega, \quad C_L = 100 \text{ pF}$                     | 25°C          |                                    | 6.4    |     | MHz                    |
|                                                         | $f = 100 \text{ kHz}, \quad R_L = 600 \text{ }\Omega, \quad C_L = 100 \text{ pF}$                     |               |                                    | 5.6    |     |                        |
| $t_s$ Settling time                                     | $\epsilon = 0.1\%$                                                                                    | 25°C          |                                    | 5      |     | $\mu$ s                |
|                                                         | $\epsilon = 0.01\%$                                                                                   |               |                                    | 10     |     |                        |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 5, \quad R_L = 10 \text{ k}\Omega$                                                          | 25°C          |                                    | 116    |     | kHz                    |
| $\phi_m$ Phase margin (see Figure 3)                    | $A_{VD} = 5, \quad R_L = 10 \text{ k}\Omega, \quad C_L = 100 \text{ pF}$                              | 25°C          |                                    | 72°    |     |                        |
|                                                         | $A_{VD} = 5, \quad R_L = 600 \text{ }\Omega, \quad C_L = 100 \text{ pF}$                              |               |                                    | 78°    |     |                        |


$^\dagger$  Full range is – 55°C to 125°C.

## PARAMETER MEASUREMENT INFORMATION

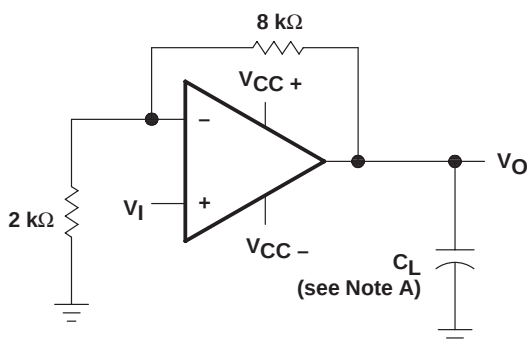


NOTE A:  $C_L$  includes fixture capacitance.

**Figure 1. Slew-Rate Test Circuit**

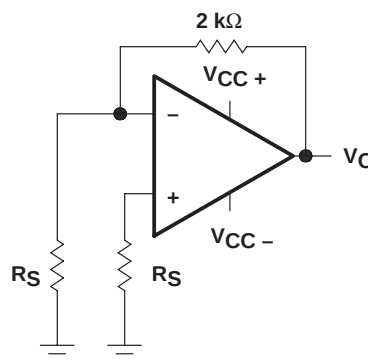

**Figure 2. Noise-Voltage Test Circuit**

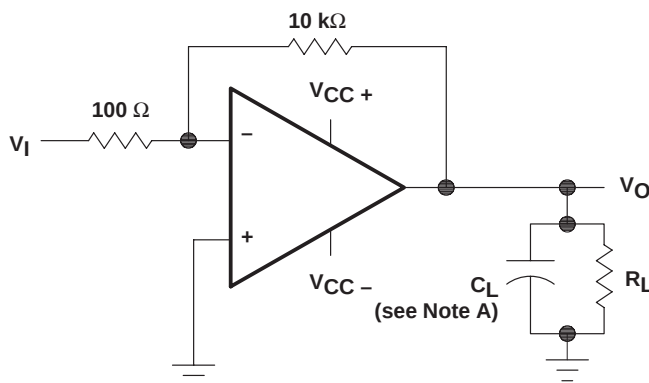

NOTE A:  $C_L$  includes fixture capacitance.

**Figure 3. Gain-Bandwidth Product and Phase-Margin Test Circuit**

## typical values

Typical values presented in this data sheet represent the median (50% point) of device parametric performance.

## Input bias and offset current

At the picoampere bias-current level typical of the TLE2161, TLE2161A, and TLE2161B, accurate measurement of the bias current becomes difficult. Not only does this measurement require a picoammeter, but test socket leakages can easily exceed the actual device bias currents. To accurately measure these small currents, Texas Instruments uses a two-step process. The socket leakage is measured using picoammeters with bias voltages applied but with no device in the socket. The device is then inserted into the socket, and a second test that measures both the socket leakage and the device input bias current is performed. The two measurements are then subtracted algebraically to determine the bias current of the device.

## TYPICAL CHARACTERISTICS

Table of Graphs

|             |                                                 |                                                         | FIGURE           |
|-------------|-------------------------------------------------|---------------------------------------------------------|------------------|
| $V_{IO}$    | Input offset voltage                            | Distribution                                            | 4                |
| $I_{IB}$    | Input bias current                              | vs Common-mode input voltage<br>vs Free-air temperature | 5<br>6           |
| $I_{IO}$    | Input offset current                            | vs Free-air temperature                                 | 6                |
| $V_{ICR}$   | Common-mode input voltage range limits          | vs Free-air temperature                                 | 7                |
| $V_{OM}$    | Maximum positive peak output voltage            | vs Output current                                       | 8                |
| $V_{OM}$    | Maximum negative peak output voltage            | vs Output current                                       | 9                |
| $V_{OM}$    | Maximum peak output voltage                     | vs Supply voltage                                       | 10, 11, 12       |
| $V_{O(PP)}$ | Maximum peak-to-peak output voltage             | vs Frequency                                            | 13, 14, 15       |
| $A_{VD}$    | Large-signal differential voltage amplification | vs Frequency<br>vs Free-air temperature                 | 16<br>17         |
| $I_{OS}$    | Short-circuit output current                    | vs Elapsed time                                         | 18               |
|             | Large-signal voltage amplification              | vs Free-air temperature                                 | 19               |
| $z_o$       | Output impedance                                | vs Frequency                                            | 20               |
| CMRR        | Common-mode rejection ratio                     | vs Frequency                                            | 21               |
| $I_{CC}$    | Supply current                                  | vs Supply voltage<br>vs Free-air temperature            | 22<br>23         |
|             | Pulse response                                  | Small signal<br>Large signal                            | 24, 25<br>26, 27 |
|             | Noise voltage (referred to input)               | 0.1 to 10 Hz                                            | 28               |
| $V_n$       | Equivalent input noise voltage                  | vs Frequency                                            | 29               |
| THD         | Total harmonic distortion                       | vs Frequency                                            | 30, 31           |
|             | Gain-bandwidth product                          | vs Supply voltage<br>vs Free-air temperature            | 32<br>33         |
| $\phi_m$    | Phase margin                                    | vs Supply voltage<br>vs Free-air temperature            | 34<br>35         |
|             | Phase shift                                     | vs Frequency                                            | 16               |

## TYPICAL CHARACTERISTICS†

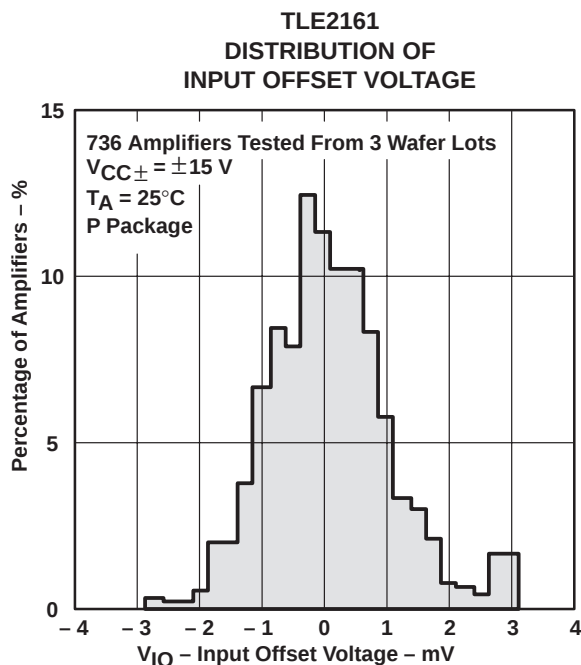


Figure 4

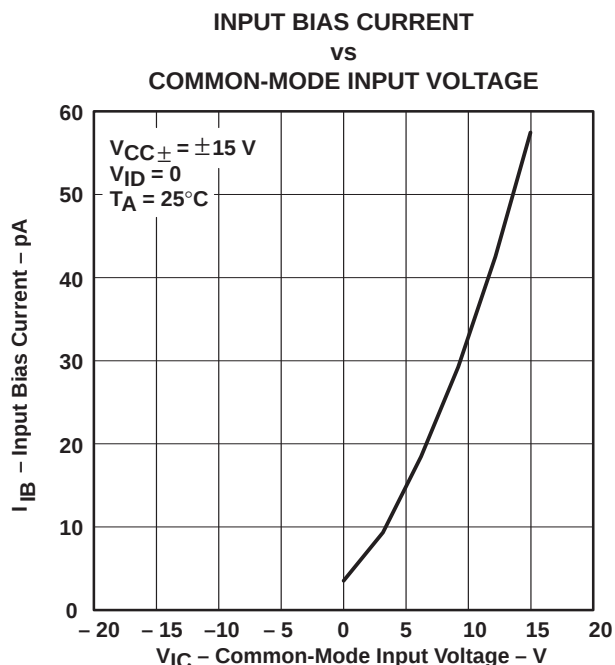


Figure 5

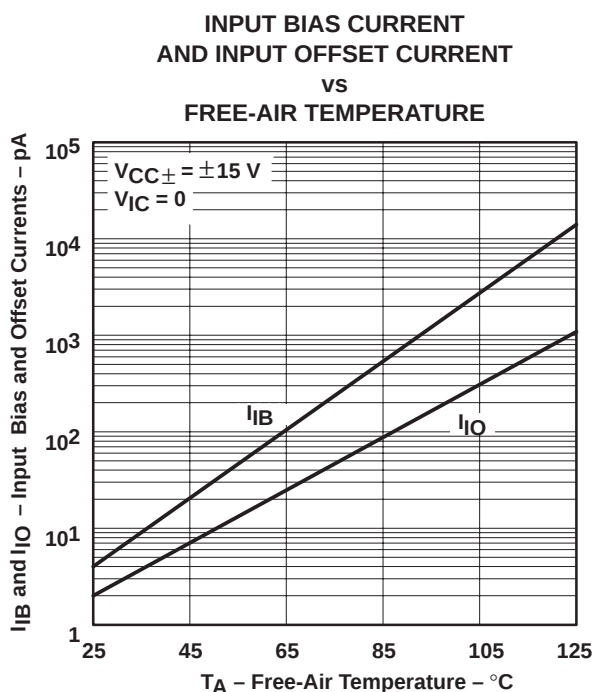


Figure 6





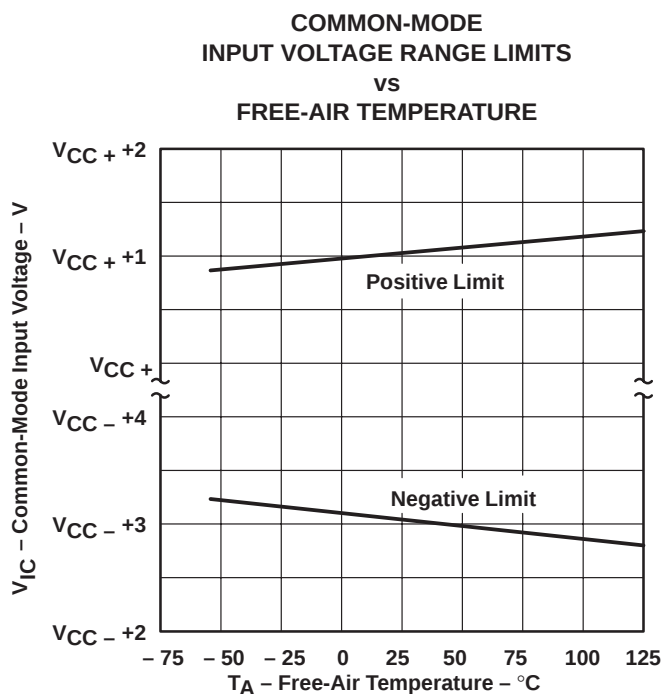


Figure 7

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

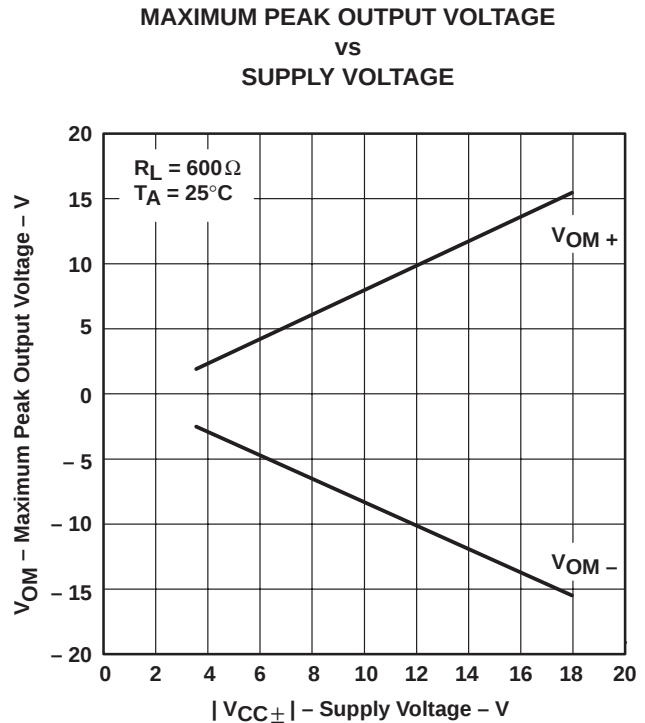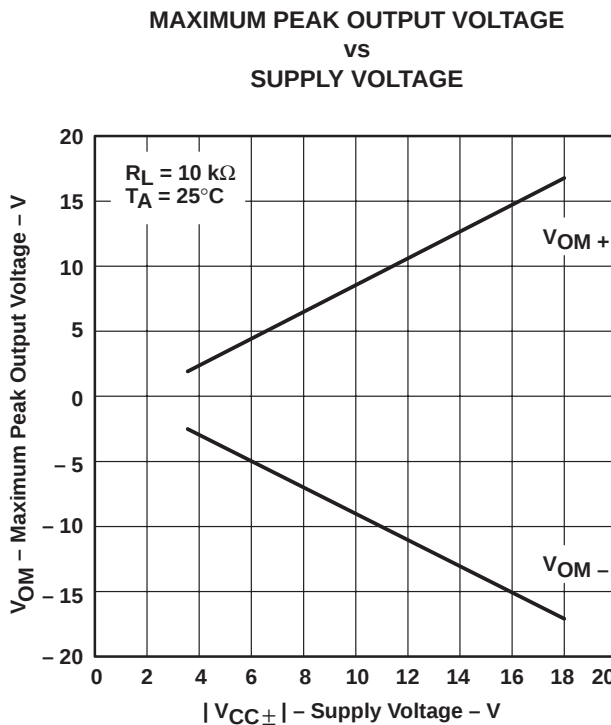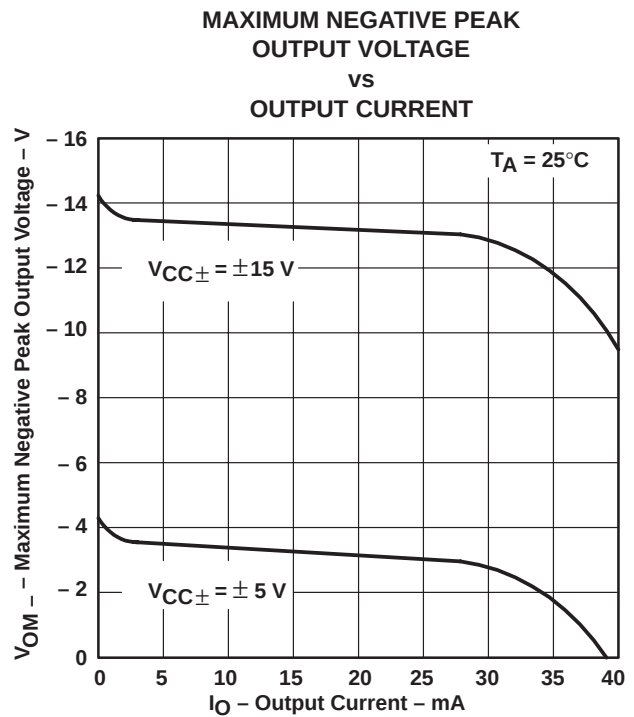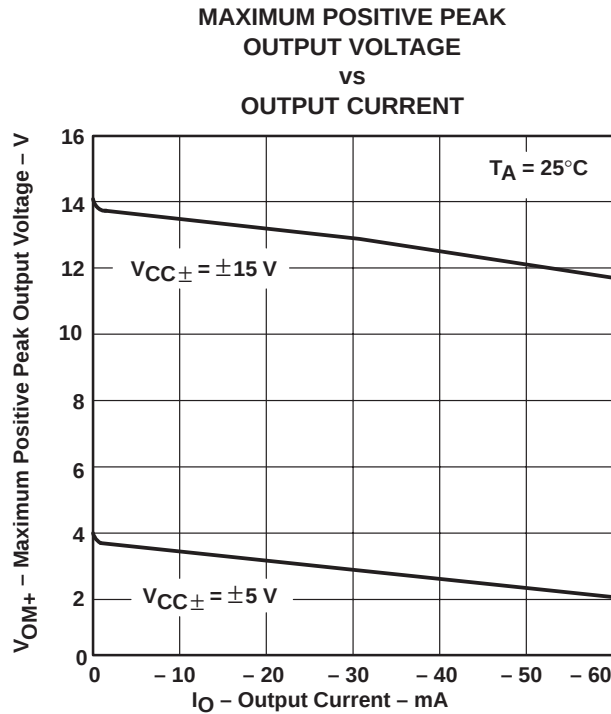

## TYPICAL CHARACTERISTICS

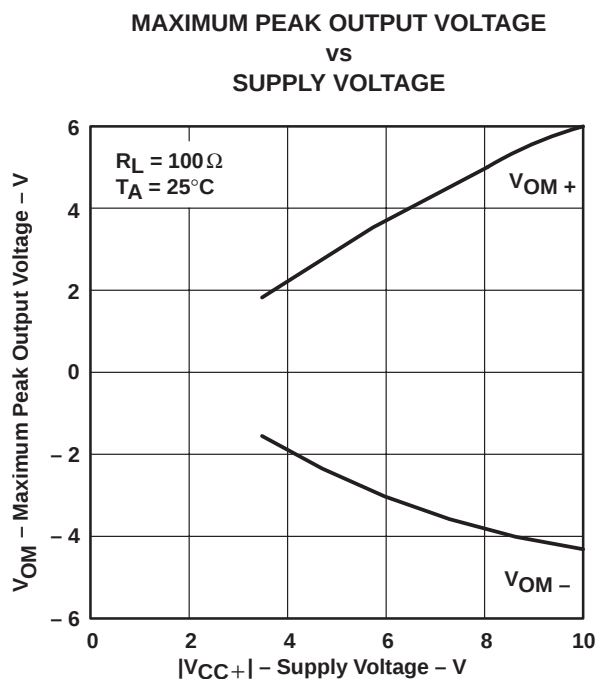


Figure 12

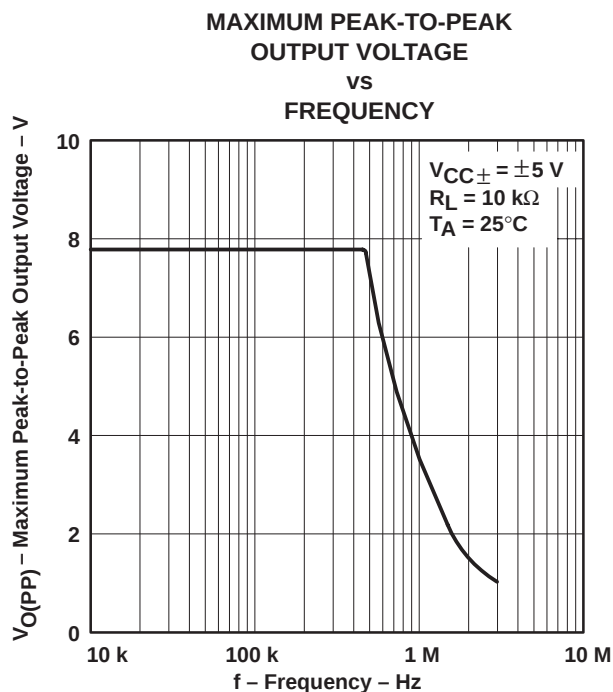


Figure 13

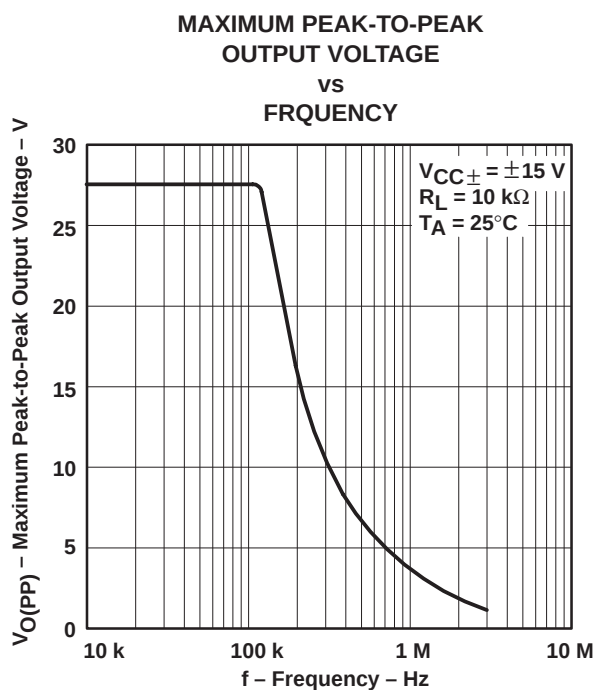


Figure 14

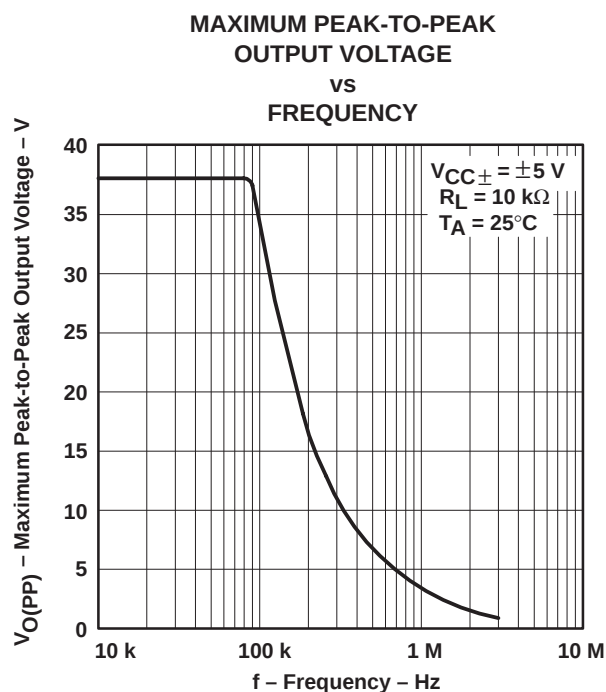


Figure 15

## TYPICAL CHARACTERISTICS†

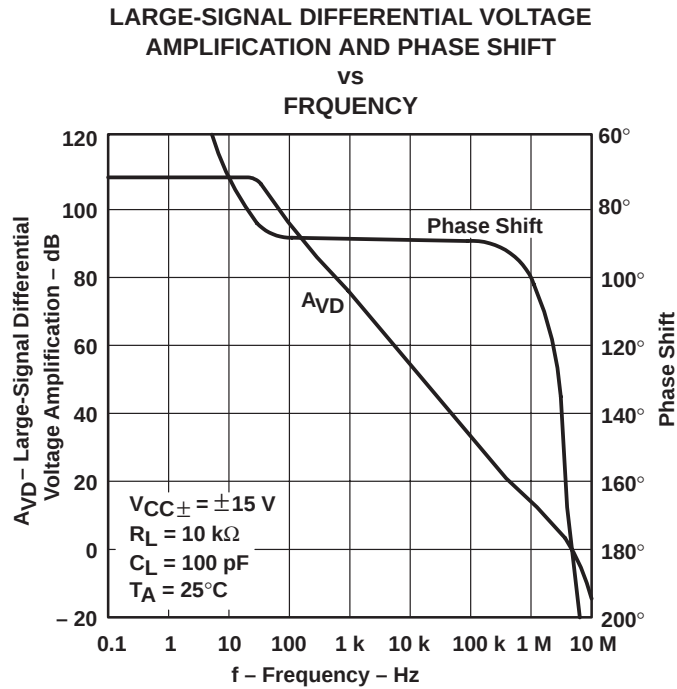


Figure 16

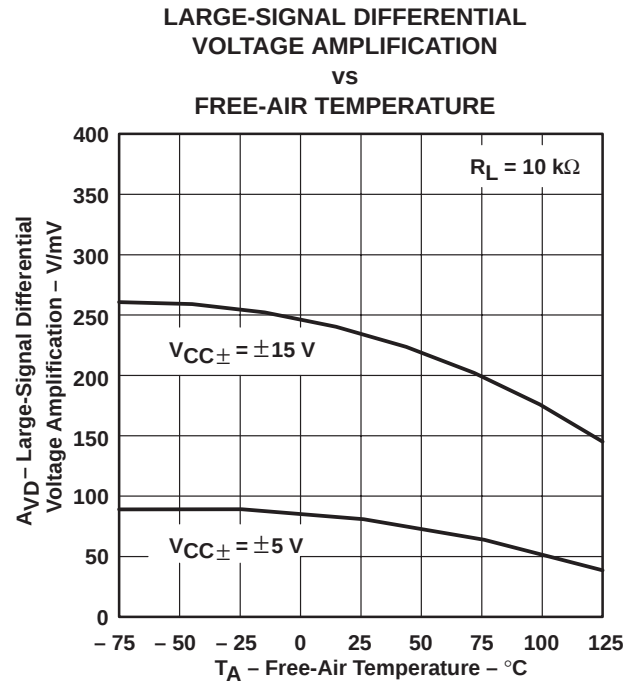


Figure 17

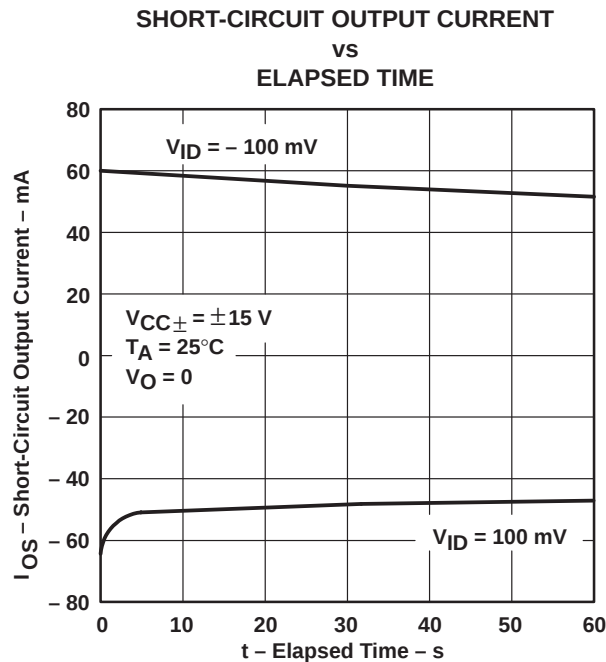


Figure 18





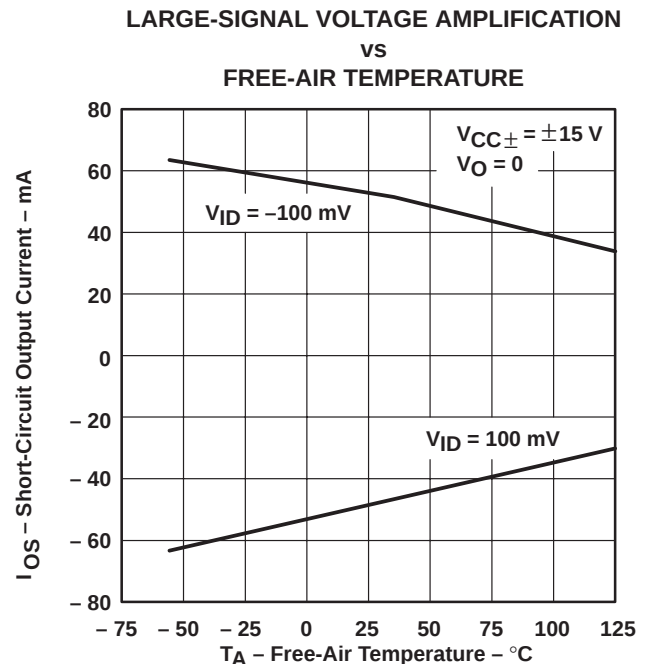


Figure 19

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS†**

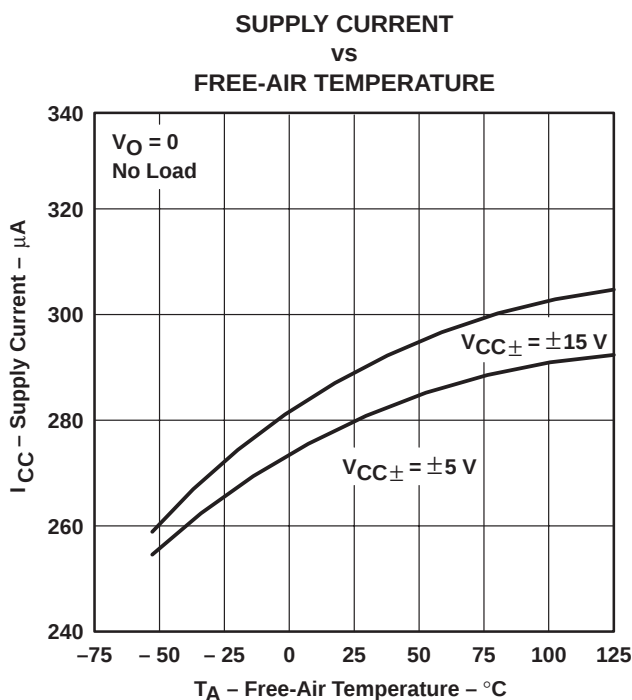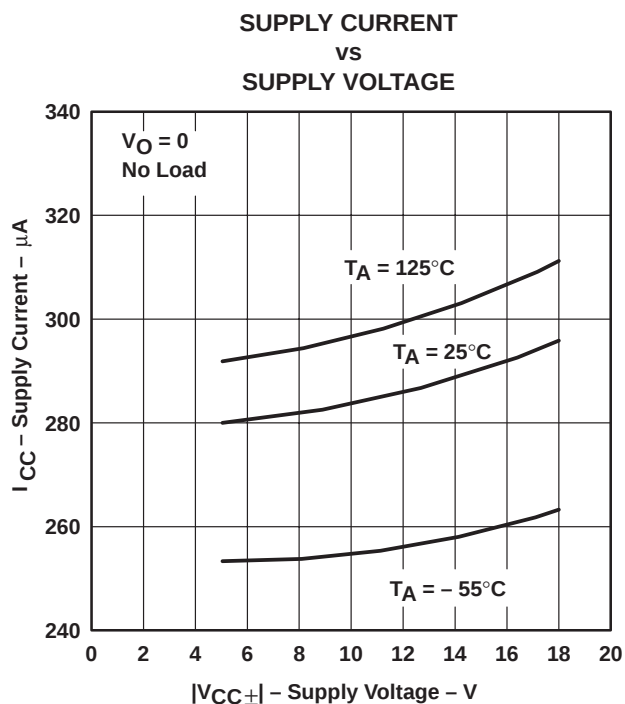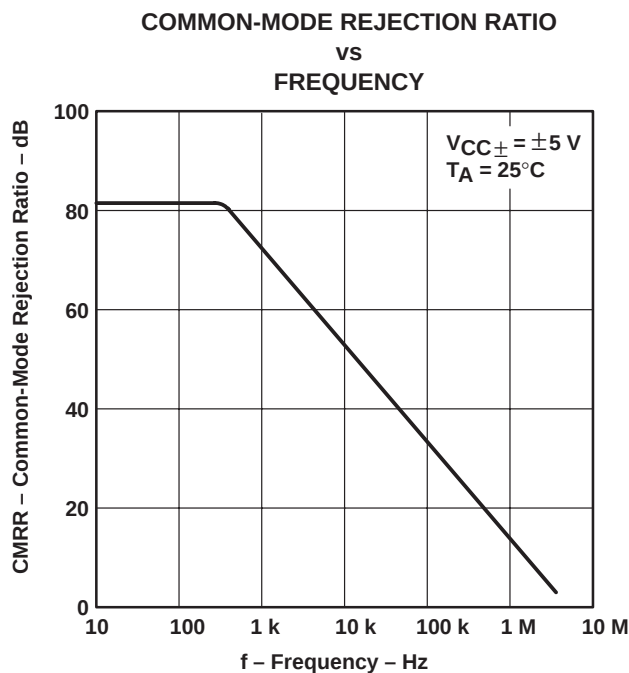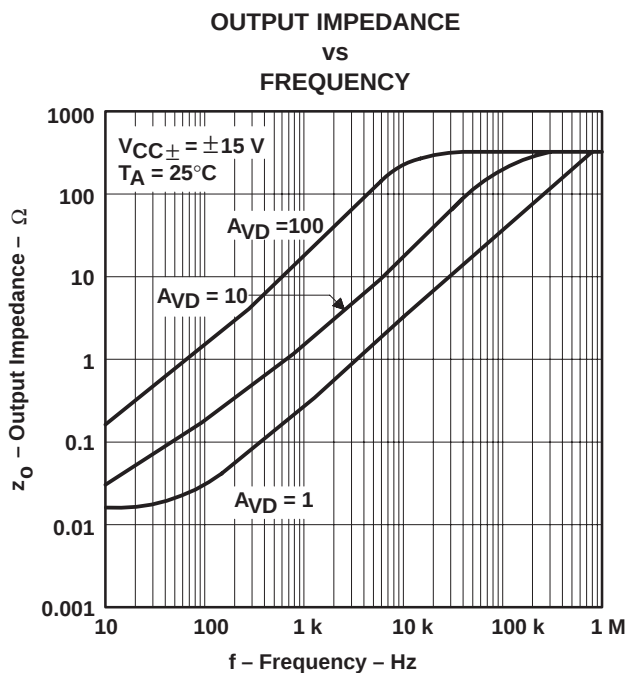

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

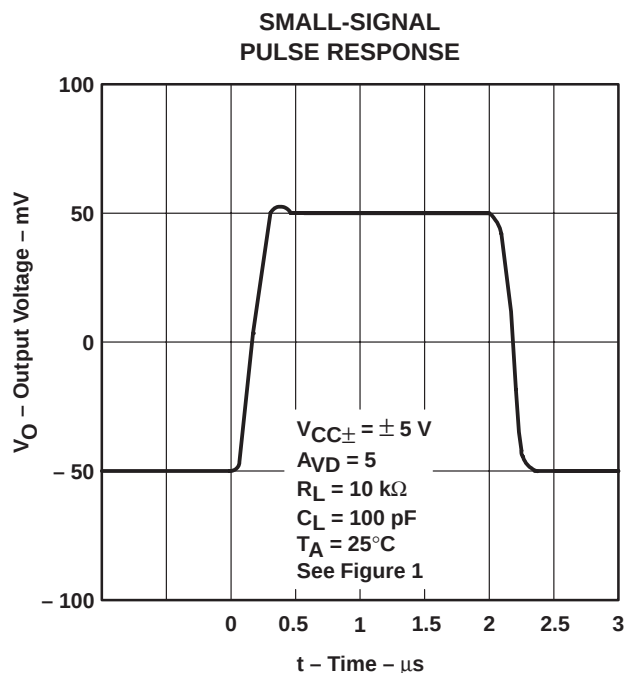


Figure 24

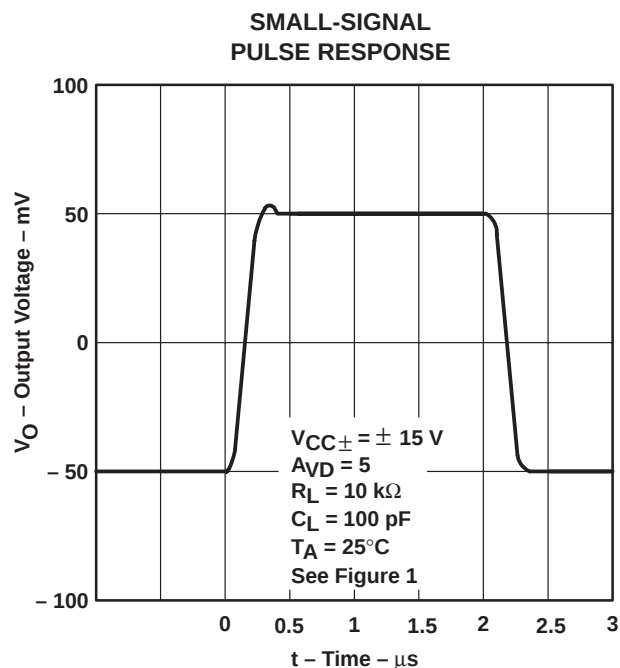


Figure 25

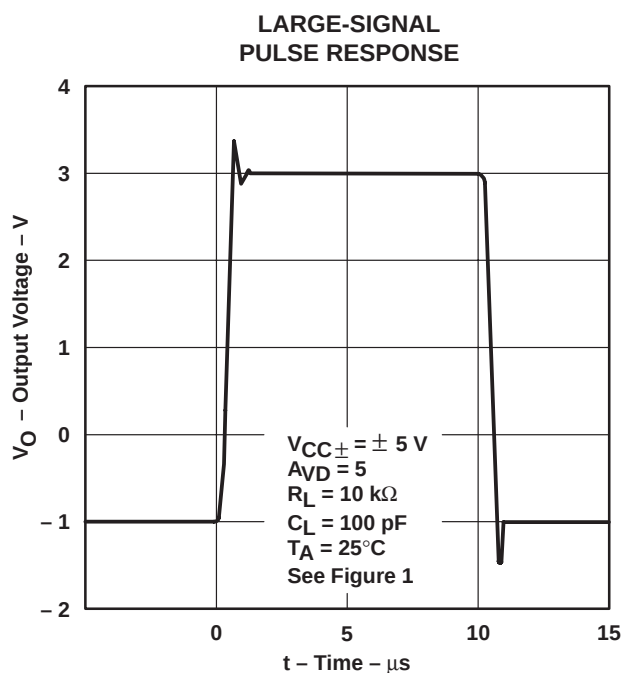


Figure 26

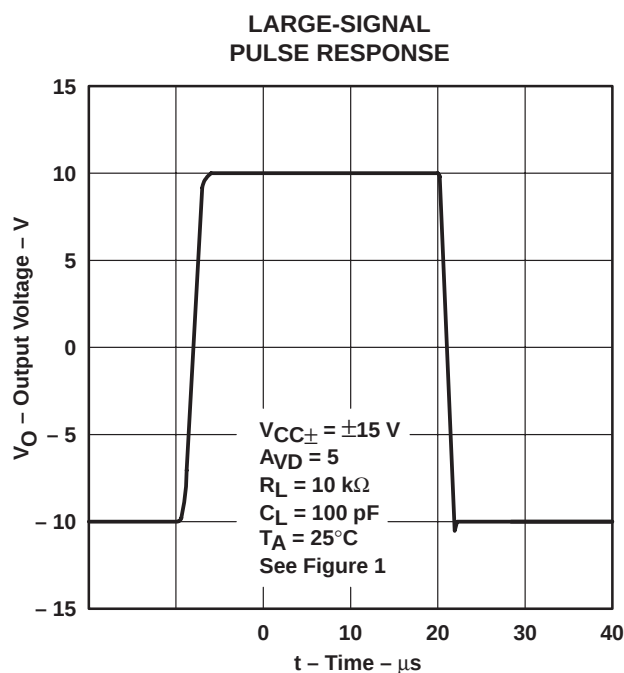


Figure 27

## TYPICAL CHARACTERISTICS

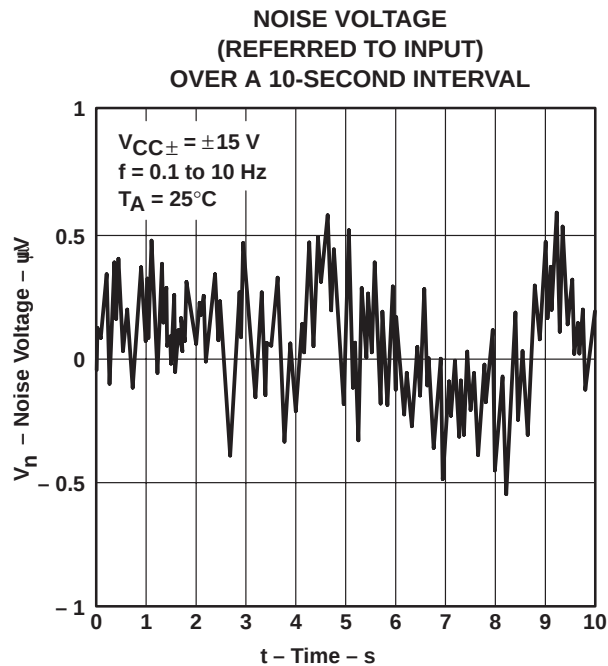


Figure 28

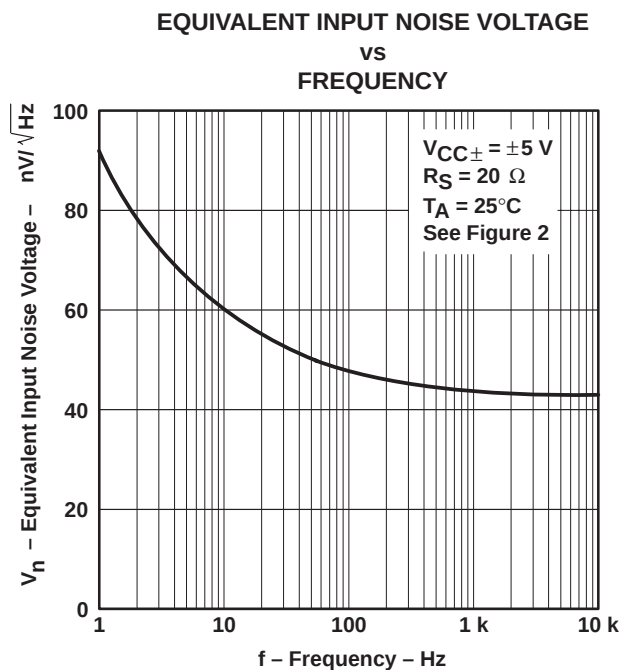


Figure 29

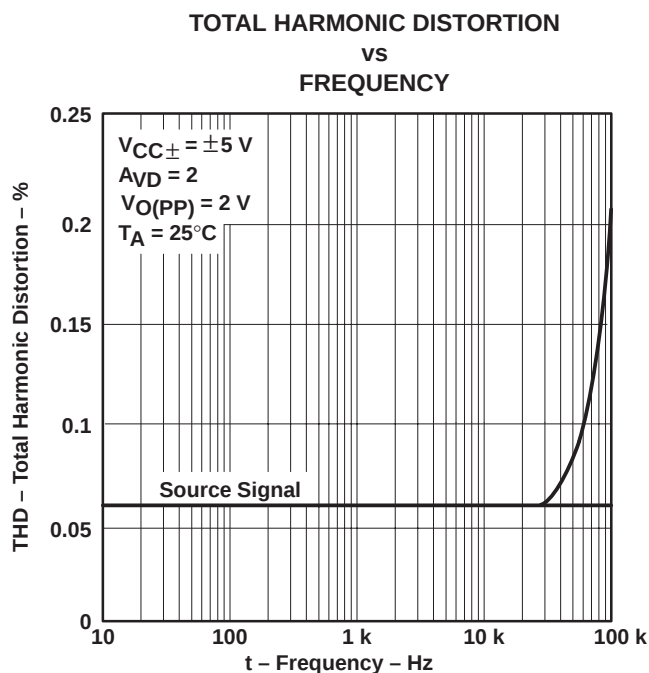


Figure 30

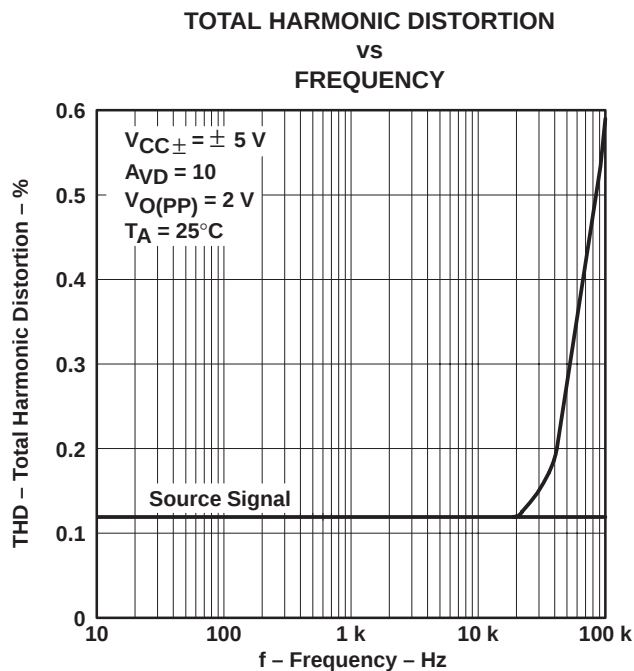


Figure 31

## TYPICAL CHARACTERISTICS

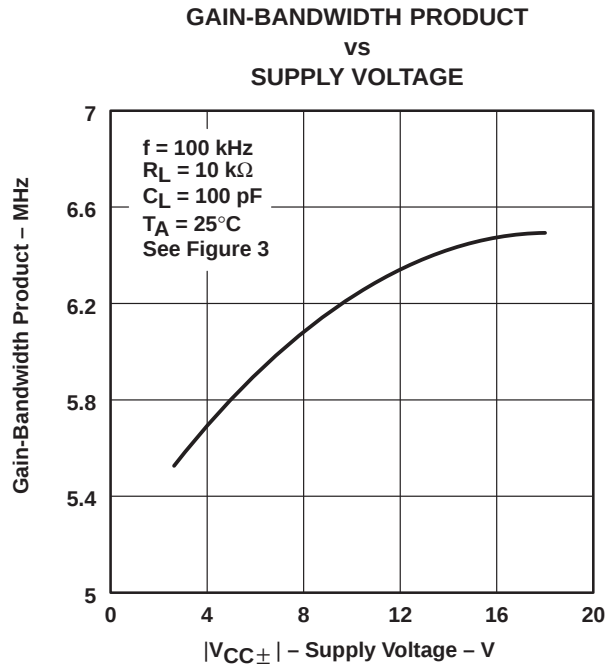


Figure 32

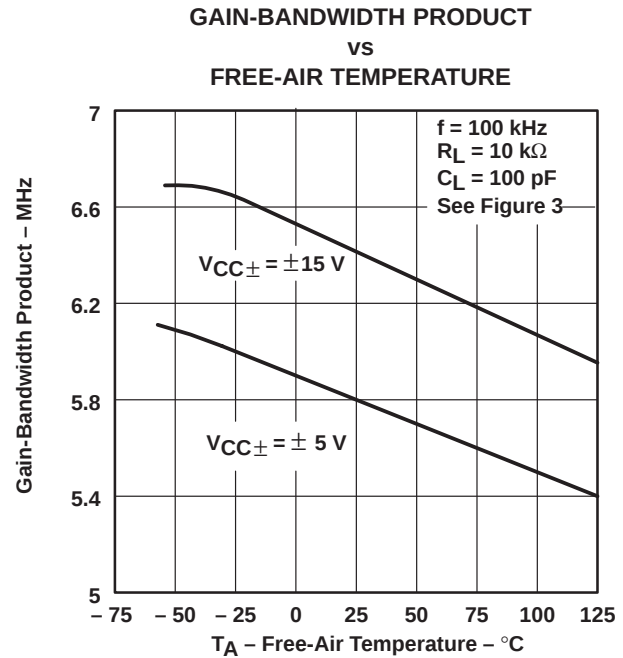


Figure 33

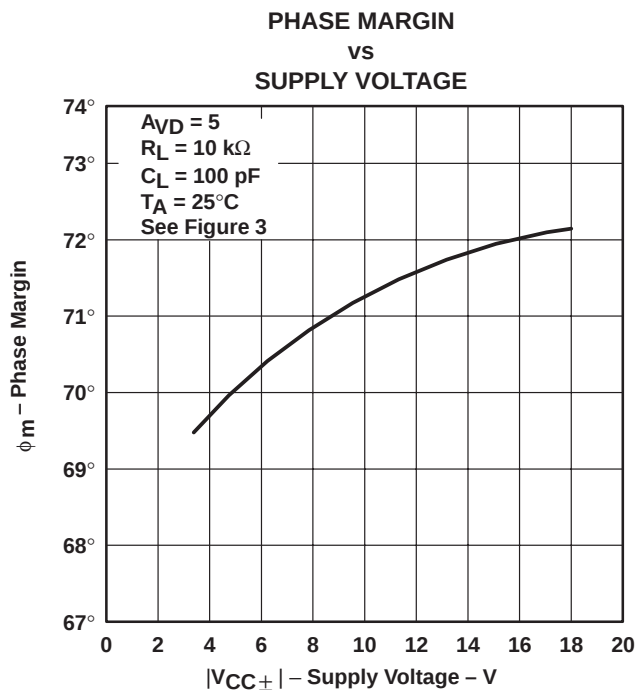


Figure 34

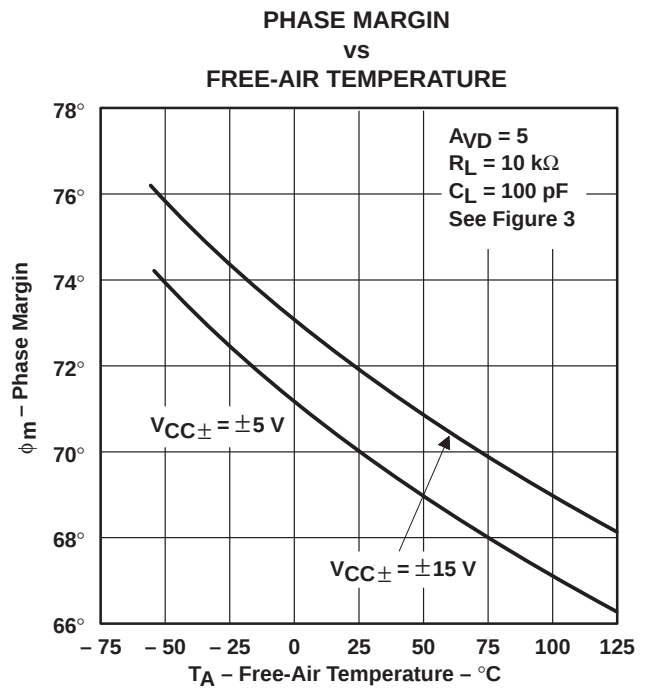


Figure 35



## APPLICATION INFORMATION

### macromodel information (continued)

```
.subckt TLE2161 1 2 3 4 5
c1      11 12 125.4E-14
c2       6  7  5.000E-12
dc       5 53 dx
de      54 5d x
dlp     90 91 dx
dlm     92 90 dx
dp       4  3 dx
egnd    99  0 poly(2) (3,0) (4,0) 0 .5 .5
fb       7 99 poly(5) vb vc ve vlp vln 0 4.085E6 -4E6 4E6 4E6 -4E6
ga       6  0 11 12 201.1E-6
gcm      0  6 10 99 3.576E-9
iss      3 10 dc 45.00E-6
hlim    90  0 vlim 1K
j1      11  2 10 jx
j2      12  1 10 jx
r2       6  9 100.0E3
rd1      4 11 4.973E3
rd2      4 12 4.973E3
ro1      8  5 280
ro2      7 99 280
rp       3  4 113.2E3
rss     10 99 4.444E6
vb       9  0 dc 0
vc       3 53 dc 2
ve      54  4 dc 2
vlim     7  8 dc 0
vlp     91  0 dc 50
vln      0 92 dc 50
.model dx D (Is=800.0E-18)
.model jx PJF (Is=1.000E-12 Beta=480E-6 Vto=-1)
.ends
```

**Figure 37. Macromodel Subcircuit**

## APPLICATION INFORMATION

### input characteristics

The TLE2161, TLE2161A and TLE2161B are specified with a minimum and a maximum input voltage that if exceeded at either input could cause the device to malfunction.

Because of the extremely high input impedance and resulting low bias-current requirements, the TLE2161, TLE2161A, and TLE2161B are well suited for low-level signal processing; however, leakage currents on printed circuit boards and sockets can easily exceed bias-current requirements and cause degradation in system performance. It is a good practice to include guard rings around inputs (see Figure 38). These guards should be driven from a low-impedance source at the same voltage level as the common-mode input.

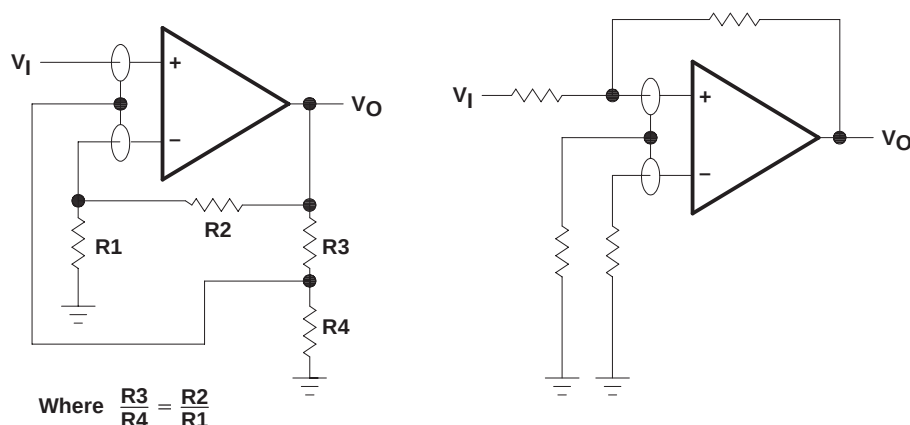


Figure 38. Use of Guard Rings

### input offset voltage nulling

The TLE2161 series offers external null pins that can further reduce the input offset voltage. The circuit in Figure 39 can be connected as shown if the feature is desired. When external nulling is not needed, the null pins may be left disconnected.

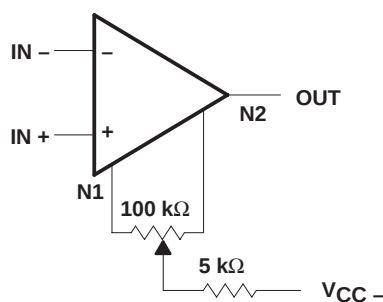


Figure 39. Input Offset Voltage Nulling

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)                 | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-----------------------------------------|-------------------------|
| 5962-9095801Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE              | N / A for Pkg Type   | -55 to 125   | 5962-<br>9095801Q2A<br>TLE2161<br>MFKB  | <a href="#">Samples</a> |
| 5962-9095801QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42                     | N / A for Pkg Type   | -55 to 125   | 9095801QPA<br>TLE2161M                  | <a href="#">Samples</a> |
| 5962-9095802Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE              | N / A for Pkg Type   | -55 to 125   | 5962-<br>9095802Q2A<br>TLE2161<br>AMFKB | <a href="#">Samples</a> |
| 5962-9095802QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42                     | N / A for Pkg Type   | -55 to 125   | 9095802QPA<br>TLE2161AM                 | <a href="#">Samples</a> |
| 5962-9095803Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE              | N / A for Pkg Type   | -55 to 125   | 5962-<br>9095803Q2A<br>TLE2161<br>BMFKB | <a href="#">Samples</a> |
| 5962-9095803QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42                     | N / A for Pkg Type   | -55 to 125   | 9095803QPA<br>TLE2161BM                 | <a href="#">Samples</a> |
| TLE2161ACD       | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | 2161AC                                  | <a href="#">Samples</a> |
| TLE2161ACP       | OBSOLETE      | PDIP         | P                  | 8    |                | TBD                        | Call TI                 | Call TI              | 0 to 70      |                                         |                         |
| TLE2161AID       | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   |              | 2161AI                                  | <a href="#">Samples</a> |
| TLE2161AIDG4     | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   |              | 2161AI                                  | <a href="#">Samples</a> |
| TLE2161AIDR      | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   |              | 2161AI                                  | <a href="#">Samples</a> |
| TLE2161AIP       | OBSOLETE      | PDIP         | P                  | 8    |                | TBD                        | Call TI                 | Call TI              |              |                                         |                         |
| TLE2161AMFKB     | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE              | N / A for Pkg Type   | -55 to 125   | 5962-<br>9095802Q2A<br>TLE2161<br>AMFKB | <a href="#">Samples</a> |
| TLE2161AMJGB     | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42                     | N / A for Pkg Type   | -55 to 125   | 9095802QPA<br>TLE2161AM                 | <a href="#">Samples</a> |
| TLE2161BCP       | OBSOLETE      | PDIP         | P                  | 8    |                | TBD                        | Call TI                 | Call TI              | 0 to 70      |                                         |                         |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)                 | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-----------------------------------------|-------------------------|
| TLE2161BIP       | OBSOLETE      | PDIP         | P                  | 8    |                | TBD                        | Call TI                 | Call TI              |              |                                         |                         |
| TLE2161BMFKB     | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE              | N / A for Pkg Type   | -55 to 125   | 5962-<br>9095803Q2A<br>TLE2161<br>BMFKB | <a href="#">Samples</a> |
| TLE2161BMJG      | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42                     | N / A for Pkg Type   | -55 to 125   | TLE2161<br>BMJG                         | <a href="#">Samples</a> |
| TLE2161BMJGB     | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42                     | N / A for Pkg Type   | -55 to 125   | 9095803QPA<br>TLE2161BM                 | <a href="#">Samples</a> |
| TLE2161BMP       | OBSOLETE      | PDIP         | P                  | 8    |                | TBD                        | Call TI                 | Call TI              | -55 to 125   |                                         |                         |
| TLE2161CD        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | 2161C                                   | <a href="#">Samples</a> |
| TLE2161CDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | 2161C                                   | <a href="#">Samples</a> |
| TLE2161CP        | OBSOLETE      | PDIP         | P                  | 8    |                | TBD                        | Call TI                 | Call TI              | 0 to 70      |                                         |                         |
| TLE2161ID        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   |              | 2161I                                   | <a href="#">Samples</a> |
| TLE2161IDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   |              | 2161I                                   | <a href="#">Samples</a> |
| TLE2161IDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   |              | 2161I                                   | <a href="#">Samples</a> |
| TLE2161IDRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   |              | 2161I                                   | <a href="#">Samples</a> |
| TLE2161IP        | OBSOLETE      | PDIP         | P                  | 8    |                | TBD                        | Call TI                 | Call TI              |              |                                         |                         |
| TLE2161MFKB      | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE              | N / A for Pkg Type   | -55 to 125   | 5962-<br>9095801Q2A<br>TLE2161<br>MFKB  | <a href="#">Samples</a> |
| TLE2161MJGB      | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42                     | N / A for Pkg Type   | -55 to 125   | 9095801QPA<br>TLE2161M                  | <a href="#">Samples</a> |
| TLE2161MP        | OBSOLETE      | PDIP         | P                  | 8    |                | TBD                        | Call TI                 | Call TI              | -55 to 125   |                                         |                         |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

---

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



**OTHER QUALIFIED VERSIONS OF TLE2161, TLE2161A, TLE2161AM, TLE2161B, TLE2161BM, TLE2161M :**

- Catalog: [TLE2161A](#), [TLE2161B](#), [TLE2161](#)
- Military: [TLE2161M](#), [TLE2161AM](#), [TLE2161BM](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

- 
- Military - QML certified for Military and Defense Applications

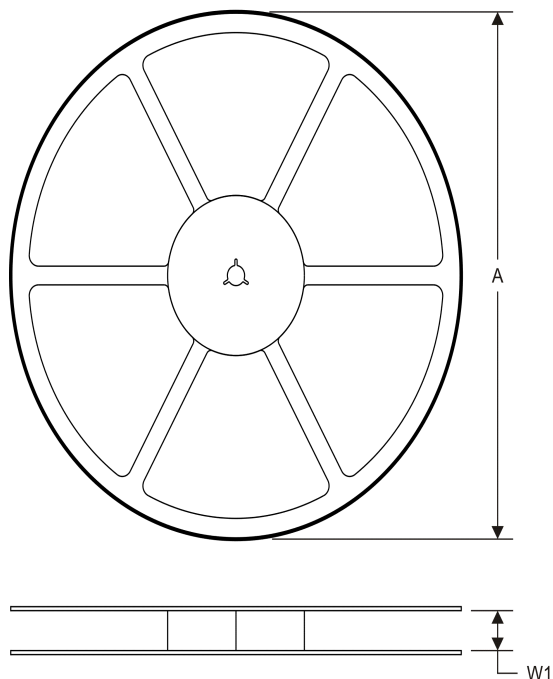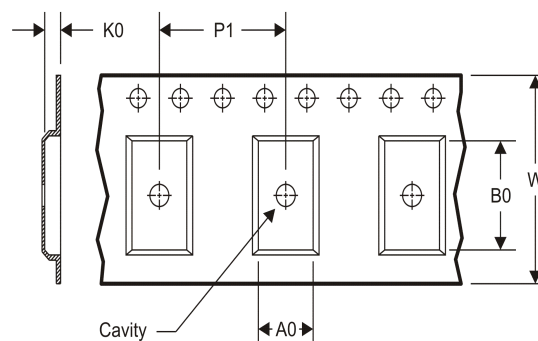**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


|    |                                                           |
|----|-----------------------------------------------------------|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLE2161AIDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLE2161IDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLE2161IDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLE2161AIDR | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TLE2161IDR  | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| TLE2161IDR  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)