

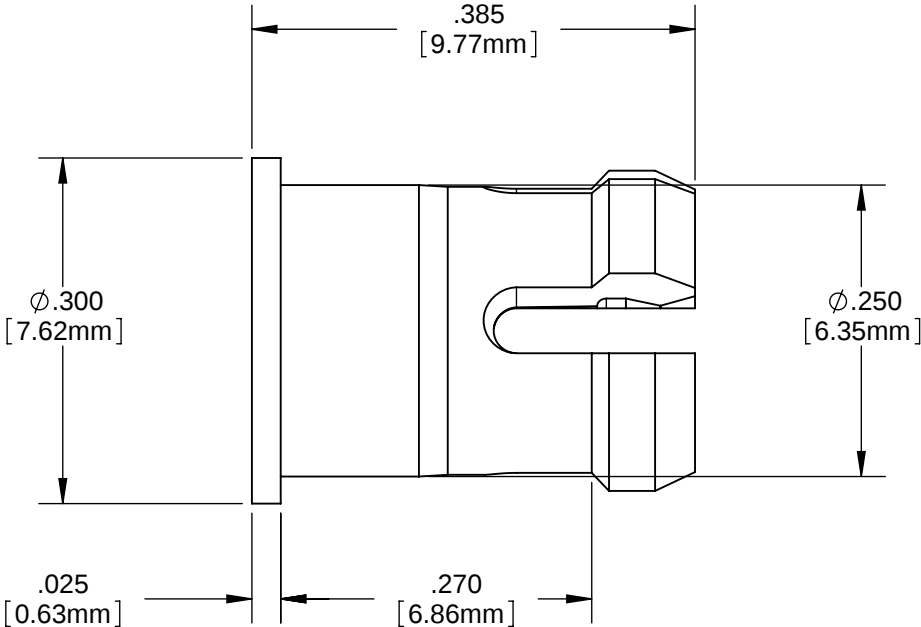
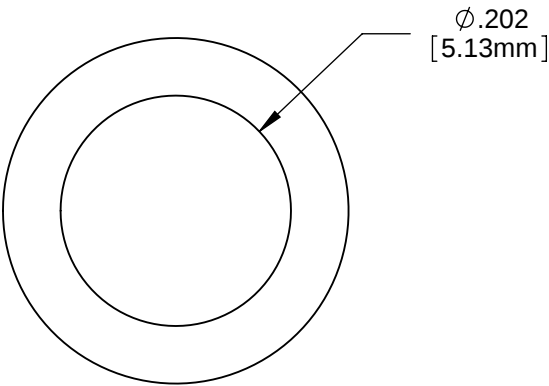
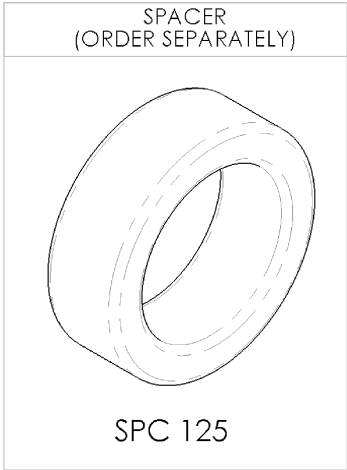


- NOTES:
1. MOUNTING: Mounts in a $\varnothing .250 \pm .002$ [$\varnothing 6.35\text{mm} \pm .05$] panel hole on .375 [9.5mm] centers. Panel thickness .125 [3.18mm] to .250 [6.35mm]. Panel hole should be deburred, but not chamfered.
 2. ASSEMBLY: Insert clip mount through panel hole, insert LED into clip mount, slide spacer over clip mount.
 3. U.S. & Foreign Pat. Issued & Pend.

REVISIONS				
ECN#	REV.	DESCRIPTION	DATE	INITIALS
	1	CHG P/N, WAS CLR 250	8-1-91	JS
	2	ADD .252 DIA, ADD DIMS .125 & .150	2-1-91	JS
	001	REVISED PER ECR111009AZ01	6-20-10	SMU

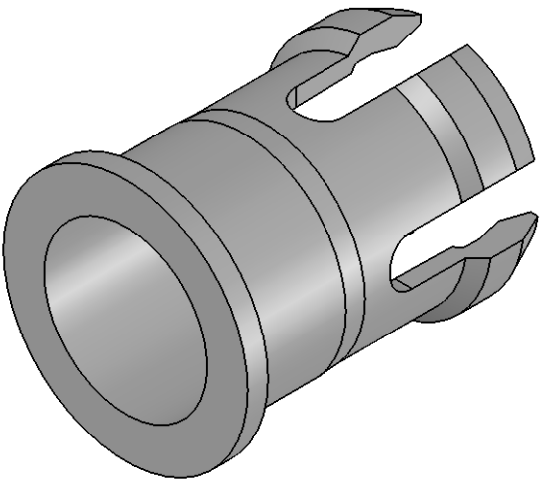

ORDERING CODE : **CLP 126 BLK**

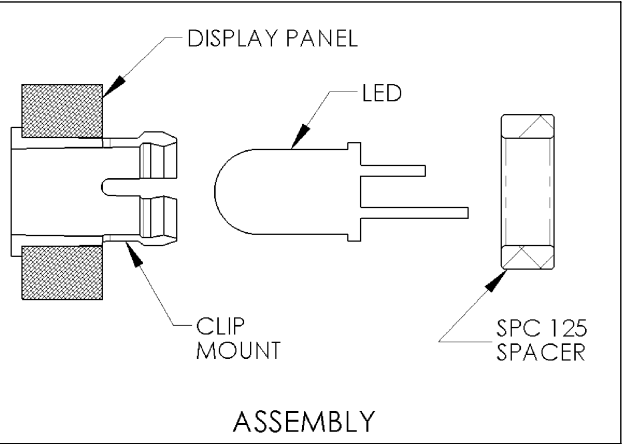

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES: ANGLES ±1' DECIMALS .X ±.020 .XX ±.010 .XXX ±.005 FINISH BREAK ALL CORNERS AND SHARP EDGES .030 MAX		MATERIAL POLYCARBONATE , UL 94-V2, BLACK		VISUAL COMMUNICATIONS COMPANY, INC. 190 Bosstick Boulevard, Suite101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vcclite.com	
		FINISH		TITLE: CLIPLITE® CLP 126 MOUNT	
THIRD ANGLE PROJECTION THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.		APPROVAL	DATE	SIZE	DWG. NO.
		DRAWN: SMU	6-20-10	B	CLP 126 BLK
		CHECKED: DZ	6-20-10	REV	001
		DO NOT SCALE DRAWING		SCALE: 1:1	
				SHEET 1 OF 1	