


Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.





ACTUAL SIZE

ORDERING CODES

MODEL **CMC 321 RTP**
 CMC 321 (LENS)
 RNG 268 (RETAINER)


COLOR _____

RTP Red Transparent BTP Blue Transparent
 ATP Amber Transparent YTP Yellow Transparent
 GTP Green Transparent CTP Clear Transparent

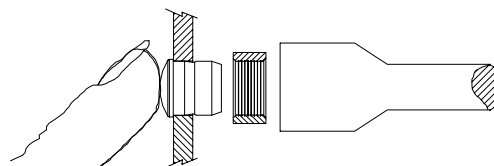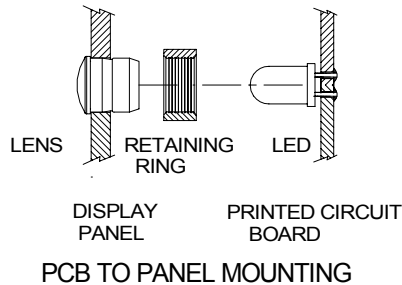

RETAINING RING INSTALLATION


Hold the lens tight to the panel using any suitable device which will not mark the lense surface. Press the ring into place using a 5/16" nut driver.

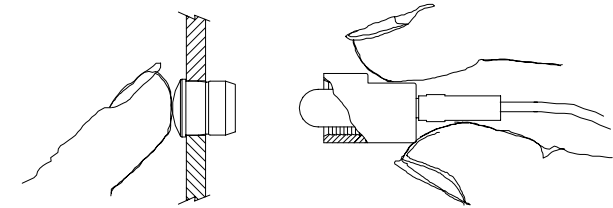


CONNECTOR INSTALLATION

Hold the lens tight to the panel using any suitable device which will not mark the lense surface. Press the connector into place.

CMC 321 LENSE

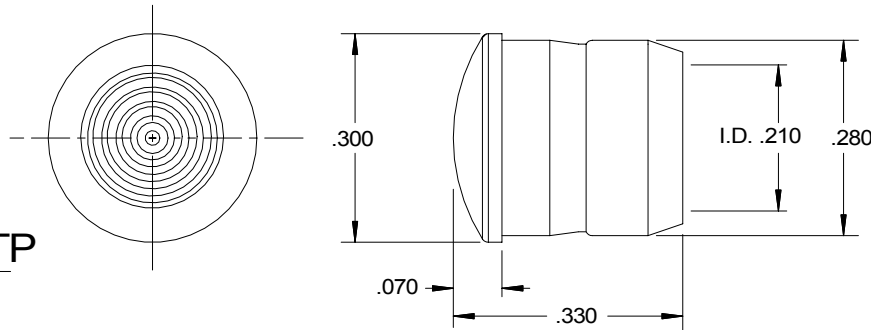

RNG 268



U.S. PAT. PEND.

NOTES:

MATERIAL: Lens - Polycarbonate
 Retaining Ring - Polypropylene
 DESIGN: Low profile lens using fresnel rings.
 MOUNTING: Mounts thru the front of panel.
 Hole size 9/32" (7.2mm) on 3/8" centers.
 For PCB mounted LED use RNG 268 Retainer.

See VCC brochure for information on CNX connectors.

REVISIONS			
NO	DESCRIPTION	DATE	BY
1			
2			
3			
4			
5			

CLIPLITE[®] CMC 321 LENSE



VISUAL COMMUNICATIONS COMPANY, INC.

7920-F Arjons Drive San Diego, California 92126 U.S.A.
 Phone (858) 549-6900 Fax (858) 549-3520 e-mail vccsales@vcclite.com

TOLERANCES	SCALE	N/A	DATE	11/07/99	DRAWING NO.
DECIMAL	±.010	DIAMETER	.003 TIR	DRAWN BY	JMS
ANGLE	± 30'	RADII	.008 Max	CHK'D	

CMC 321A