



STANDARD INTERCONNECTS FOR 3mm & 5mm LEDs


3mm BI-LEAD ("B" CONNECTOR)

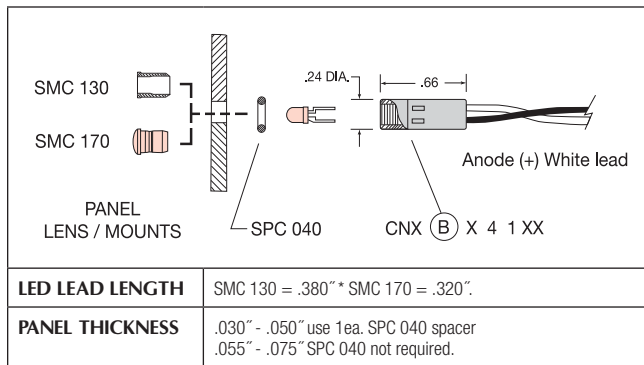


5mm BI-LEAD ("C" CONNECTOR)

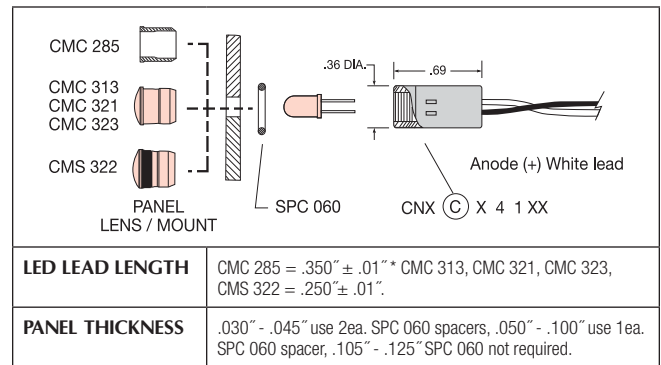


CNX 310 SERIES 5mm BI-LEAD (W/RESISTOR)

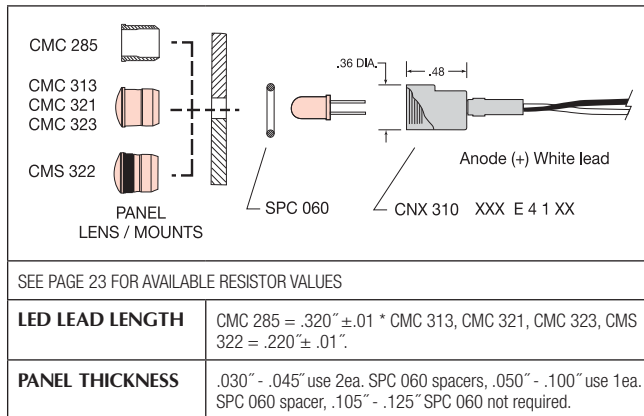


5mm TRI-LEAD ("D" CONNECTOR)

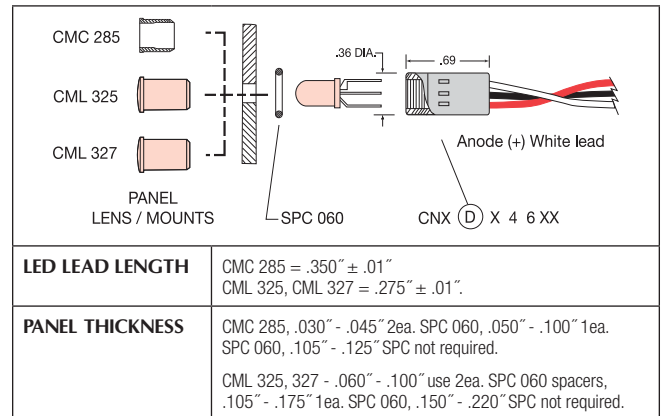

5mm FLANGELESS ("K" CONNECTOR)

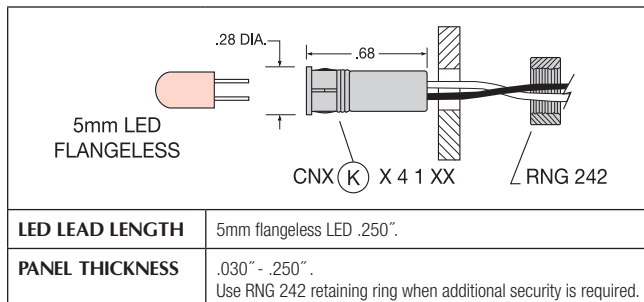

PLAIN & LOCKING HEADER

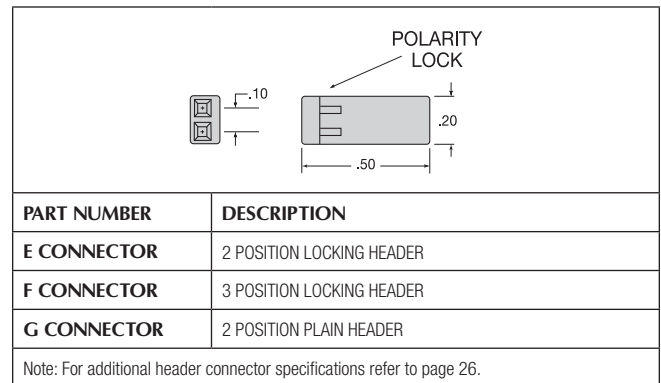

ORDERING CODES

CNX C E 4 1 04			
TERMINATION		WIRE SIZE	WIRE COLOR
PANEL (LED) SIDE		WIRE LENGTH	
PC BOARD SIDE			
B 3mm Panel Connector	2 Lead	STANDARD 4 24 AWG	1 - WHT - BLK
C 5mm Panel Connector	2 Lead		2 - RED - BLK
D 5mm Panel Connector	3 Lead		6 - WHT - RED - BLK
K Panel Socket	2 Lead		
E Locking Hdr Connector	2 Lead		04 4 INCHES
F Locking Hdr Connector	3 Lead		06 6 INCHES
G Plain Hdr Connector	2 Lead		08 8 INCHES
X Wire Leads - Stripped Ends			12 12 INCHES
			18 18 INCHES
			24 24 INCHES

ADDITIONAL OPTIONS AVAILABLE