

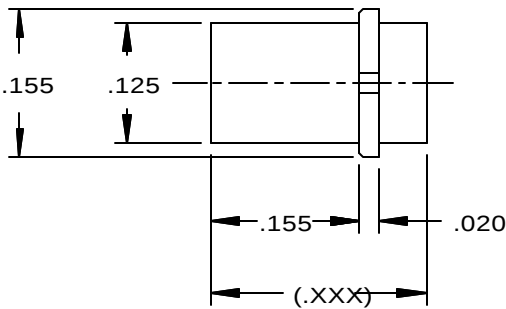
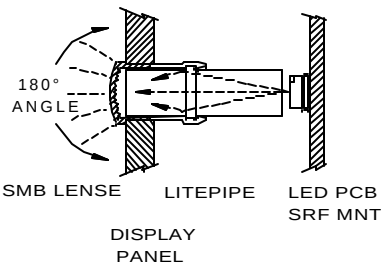
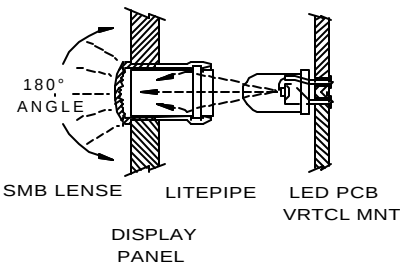


Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

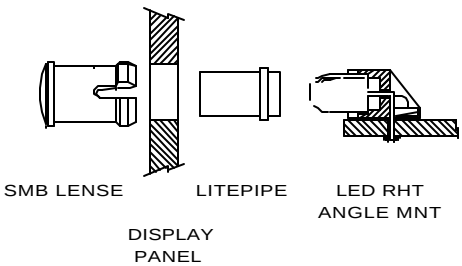

ORDERING CODE

MODEL — LSV 040 CTP	
CODE (INCHES)	COLOR CTP CLEAR
020	.200"
040	.400"
060	.600"
080	.800"
100	1.0"
120	1.2"
Length = front of panel to LED	

NOTES:

- (1) Material: Acrylic (Optical grade)
- (2) Mounting: Use CLIPLITE Lenses SMB 200 and SMQ 250 Series Lenses mounts in a .171" hole on 1/4" centers. Panel thickness 1/32" to 1/8" Standoff available in increments of .010" for fine LED height adjustment. See VCC catalog for lense and standoff spec. spec.
- (3) Lense Lock: Insert litepipe into lense aligning the tabs with the lense slot.

U.S. & Foreign Pat. Issued & Pend.

REVISIONS				CLIPLITE® 3mm LITEPIPE VERTICAL			
NO	DESCRIPTION	DATE	BY				
1				VCC VISUAL COMMUNICATIONS COMPANY, INC. 7920-F Arjons Drive San Diego, California 92126 U.S.A. Phone (858) 549-6900 Fax (858) 549-3520 e-mail vccsales@vcclite.com			
2							
3							
4				TOLERANCES	SCALE N/A	DATE 04/04/96	DRAWING NO. LSV000A
5				DECIMAL ± .010	DIAMETER .003 TIR	DRAWN BY JMS	
				ANGLE ± 30'	RADII .008 Max	CHK'D	

LSV000A