

DIN-Rail Receptacle

DRAC DP 15

DRAC GF 15

DRAC DP 20

DRAC GF 20

NEW



DIN-Rail receptacles are enclosed 15A and 20A power outlets that provide a convenient power source for portable computers or test devices for in-the-panel troubleshooting.

- Easily snaps onto 35mm DIN-rail
- Panel mountable
- 15A or 20A versions
- Easy to wire
- Available with ground fault current interrupt (GFCI) or standard duplex outlets
- Option for visual indication of power included with GFCI
- NEMA rated enclosure with UL94 VO flammability rating
- UL508A and cULus approved

Canada

Weidmüller, Canada
10 Spy Court
Markham, Ontario L3R 5H6
Telephone: (800) 268-4080
Facsimile: (905) 475-2798
Email: info1@weidmuller.ca
Website: www.weidmuller.ca

Mexico

Weidmüller, Mexico
Blvd. Hermanos Serdán 698
Col. San Rafael Oriente
Puebla, Puebla, Mexico
C.P. 72029
Telephone: 01 222 2686267
Facsimile: 01 222 2686219
Email: clientes@weidmuller.com.mx
Website: www.weidmuller.com.mx


United States

Weidmüller
821 Southlake Blvd.
Richmond, Virginia 23236
Telephone: (800) 849-9343
Facsimile: (804) 379-2593
Email: info@weidmuller.com
Website: www.weidmuller.com

Weidmüller 

DIN-Rail Receptacle

Dimensional Drawing

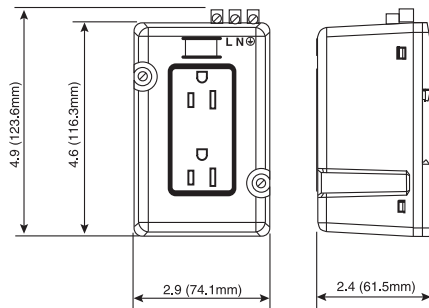

15 Amp Duplex



15 Amp GFCI



Technical data

Voltage	125 VAC
Current	15A
Operating Frequency	50 - 60 Hz
Dielectric Voltage	Withstands 2000V per UL498
Current Interrupting	Full rated current
Trip Level	N/A
Termination Wire Size	#20 - #10 AWG solid or stranded
Terminal Torque	7 lb.-in. (.79 Nm)
Temperature:	
Operating	-35°C to 60°C
Storage	-25°C to 80°C
Material Listing	
Enclosure Cover, Flammibility	PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Enclosure Base, Flammibility	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Spring	Stainless Steel

Voltage	125 VAC
Current	15A
Operating Frequency	50 - 60 Hz
Dielectric Voltage	Withstands 2000V per UL498
Current Interrupting	Full rated current
Trip Level	N/A
Termination Wire Size	#20 - #10 AWG solid or stranded
Terminal Torque	7 lb.-in. (.79 Nm)
Temperature:	
Operating	-35°C to 60°C
Storage	-25°C to 80°C
Material Listing	
Enclosure Cover, Flammibility	PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Enclosure Base, Flammibility	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Spring	Stainless Steel

Voltage	125 VAC
Current	15A
Operating Frequency	50 - 60 Hz
Dielectric Voltage	Withstands 1500V per UL498
Current Interrupting	10 kA
Trip Level	5±1 mA
Termination Wire Size	#20 - #10 AWG solid or stranded
Terminal Torque	7 lb.-in. (.79 Nm)
Temperature:	
Operating	-35°C to 60°C
Storage	-25°C to 80°C
Material Listing	
Enclosure Cover, Flammibility	PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Enclosure Base, Flammibility	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Spring	Stainless Steel

Approvals/Certifications

--

Description
TUL 508A (file # E223801)
cULus
UL498
NEMA WD-6
NEMA 5-15R

Description
TUL 508A (file # E223801)
cULus
UL 943
NEMA WD-6
NEMA 5-15R

Ordering data


--

Type	Part No.
DRAC DP 15	6720005421

Type	Part No.
DRAC GF 15	6720005422

DIN-Rail Receptacle

Dimensional Drawing

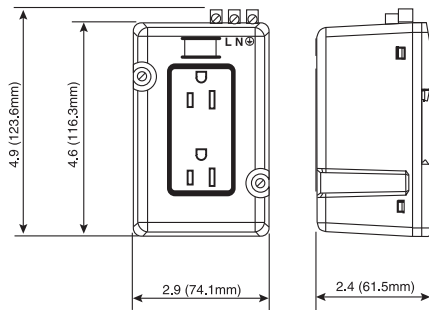

20 Amp Duplex



20 Amp GFCI



Technical data

Voltage
Current
Operating Frequency
Dielectric Voltage
Current Interrupting
Trip Level
Termination Wire Size
Terminal Torque
Temperature:
Operating
Storage
Material Listing
Enclosure Cover, Flammability
Enclosure Base, Flammability
Spring

125 VAC
20A
50 - 60 Hz
Withstands 2000V per UL498
Full rated current
N/A
#20 - #10 AWG solid or stranded
7 lb.-in. (.79 Nm)
-35°C to 60°C
-25°C to 80°C
PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Stainless Steel

125 VAC
20A
50 - 60 Hz
Withstands 1500V per UL498
10 kA
5±1 mA
#20 - #10 AWG solid or stranded
7 lb.-in. (.79 Nm)
-35°C to 60°C
-25°C to 80°C
PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Stainless Steel

Approvals/Certifications

Description
TUL 508A (file # E223801)
cULus
UL498
NEMA WD-6
NEMA 5-15R

Description
TUL 508A (file # E223801)
cULus
UL 943
NEMA WD-6
NEMA 5-15R

Ordering data

Type	Part No.
DRAC DP 20	6720005420

Type	Part No.
DRAC GF 20	6720005423

