

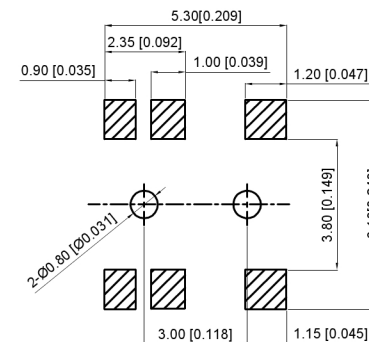
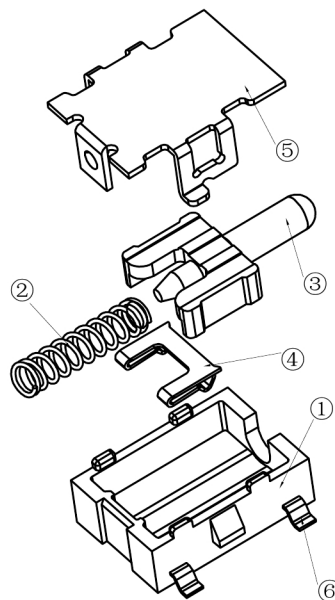


The circuit principle diagram
电路原理图



PCB Installation Dimension Drawing
PCB安装尺寸图

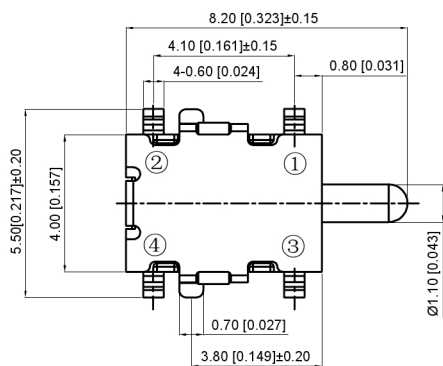

1. Rated voltage: 16V (DC)
1.额定电压: 16V (DC)
Rated current: 0.5A
额定电流: 0.5A
2. Insulation resistance: $\geq 50M \Omega$
2.绝缘电阻: $\geq 50M \Omega$
3. Contact resistance: $\leq 200m \Omega$
3.接触电阻: $\leq 200m \Omega$

4. Withstand voltage: AC 250V (50Hz)/min
4.耐压: AC 250V (50Hz)/min
5. Operating temperature: $-10^{\circ}C \sim +60^{\circ}C$
5.使用温度: $-10^{\circ}C \sim +60^{\circ}C$
6. Action force: $100 \pm 30gf$
6.动作力: $100 \pm 30gf$
7. Service life: 50000 times
7.寿命: 50000次

6	Terminal 端子	Phosphor copper 磷铜	4	Ag plating 镀银
5	Housing 外壳	Beryllium bronze 铍青铜	1	Ag plating 镀银
4	Reed 簧片	Silver copper 复银铜	1	
3	Handle 按柄	PA46	1	Black 黑色
2	Spring 弹簧	SUS	1	
1	Base 基座	PA46	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

					ANGLAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
REVISIONS						UNSPECIFIED TOLERANCES
		DATE	REVISED	APPROVED		
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN		VIEW:	PART NO.: TM-1022-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
			SHEET
			REVISIC
			1/1
			A0