


## Data Sheet | Item Number: 206-2130

VDE crosshead screwdriver; PZ0 x 60; VDE tested; 1000 V; insulated; 2-component grip; size 1 (100 mm); green/gray

<https://www.wago.com/206-2130>



Color: ☐ Green/gray

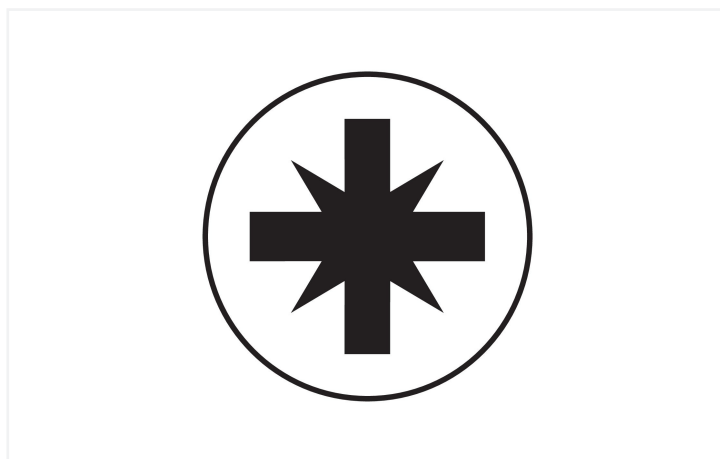

### Notes

#### Safety Information

- Always use the appropriate VDE screwdriver variant for your screw head variant to prevent injury from slipping and damage to the VDE screwdriver or screw head.
- Keep the VDE screwdriver free from oil, grease and moisture to prevent slipping and potential injury.
- If the tip is damaged, replace the VDE screwdriver to prevent slipping and injury.
- Do not use the VDE screwdriver if the handle or insulation is damaged to prevent the risk of electric shock.
- Do not use the VDE screwdriver to open the contact spring on products with operating slots.
- Do not use the VDE screwdriver as a prying tool or chisel.
- Wear approved eye protection and the necessary personal protective equipment for your application.
- Environmental and storage information: Ensure that VDE screwdrivers are not exposed to strong heat sources (e.g., heating pipes or steam lines) or to UV radiation.

#### Safety information 2

1. Work on live or load-carrying parts may only be performed by properly trained and qualified personnel.
2. Use only for its intended purpose!
3. Observe national regulations, standards and guidelines!
4. Follow the technical specifications of the products!
5. Do not use soiled components!
6. Use only compatible bits and drives!



| Physical data |                       |
|---------------|-----------------------|
| Width         | 21 mm / 0.827 inches  |
| Height        | 19 mm / 0.748 inches  |
| Depth         | 160 mm / 6.299 inches |
| Blade length  | 60 mm                 |
| Grip length   | 100 mm                |

| Mechanical data      |          |
|----------------------|----------|
| Tip type             | PZ0      |
| Continuous blade     | No       |
| Blade type           | Straight |
| Roll-away protection | Yes      |
| Hanging eyelet       | Yes      |
| Grip marking         | Yes      |
| Head marking         | Yes      |

| Material data  |                                   |
|----------------|-----------------------------------|
| Color          | Green/gray                        |
| Material 1     | Polypropylen (PP)                 |
| Material 2     | Thermoplastische Elastomere (TPE) |
| Fire load      | 0 MJ                              |
| Blade material | 73MoV52                           |
| Blade surface  | Burnished                         |
| Weight         | 27 g                              |

| Commercial data       |               |
|-----------------------|---------------|
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4066966470901 |
| Customs tariff number | 82054000000   |

| Product Classification |                      |
|------------------------|----------------------|
| UNSPSC                 | 27111701             |
| ETIM 9.0               | EC000144             |
| ETIM 8.0               | EC000144             |
| ECCN                   | NO US CLASSIFICATION |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |



|                                           |                                                                                   |
|-------------------------------------------|-----------------------------------------------------------------------------------|
| Downloads                                 |                                                                                   |
| Environmental Product Compliance          |                                                                                   |
| Compliance Search                         |                                                                                   |
| Environmental Product Compliance 206-2130 |  |