


## SPECIFICATION FOR APPROVAL

CUSTOMER		CUST P/N.	
ITEM		Description	7*10觸發線圈
PART NO.	TTC1150AN	DATE	2021.5.10

**(1) DIMENSION(UNIT:±2.0mm)**

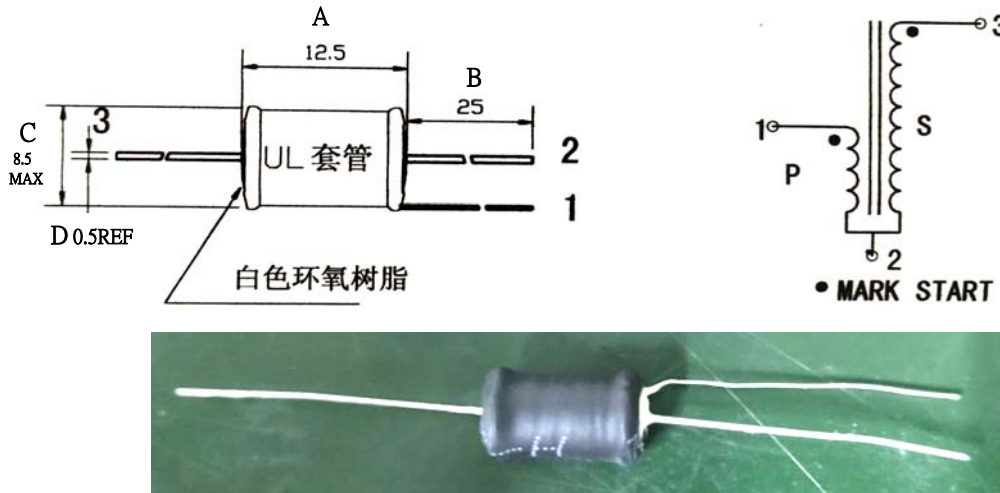

**(2) ELECTRICAL REQUIREMENTS**

	TEST CONDITION	FREQUENCY	(3) TEST INSTRUMENTS	
		VOLTAGE	LCR-METER:	
$L_{1-2}$	2.6uH±25%	1KHz 0.25V	V	WK3260B
$L_{2-3}$	3.0mH±20%	1KHz 0.25V	V	WK3260B
$DCR_{1-2}$	0.07Ω (REF)		V	TH2512
$DCR_{2-3}$	70.0Ω (REF)			TH2512

**(4) TURN:TS(REF)**

**(5) MATERIAL LIST**

ITEM	MATERIAL	DESCRIPTION

REMARK:	APPROVED	CHECKED	DRAWN BY
	姜杰文	姜法寶	王艷

## TEST DATA FOR PREPRODUCTION SAMPLES

<b>CUSTOMER:</b>				<b>Part No.</b>	TTC1150AN	<b>Test Q'ty:</b>	5	<b>PCS</b>			
<b>CUST P/N.</b>				<b>Description:</b>	7*10觸發線圈		<b>Date:</b>	2020.11.10			
<b>MEASURE ITEM</b>	L <sub>1~2</sub>	L <sub>2~3</sub>	DCR <sub>1~2</sub>	DCR <sub>2~3</sub>	A	B	C				
	( $\mu$ H)	(mH)	( $\Omega$ )	( $\Omega$ )	(mm)	(mm)	(mm)				
<b>SPECIFIC</b>	2.6	3.0	0.07	70.0	12.5	25.0	8.5				
<b>SUGGEST</b>	$\pm 25\%$	$\pm 20\%$	REF	REF	$\pm 2.0$	$\pm 2.0$	Max				
1	2.72	3.12	0.071	31.50	12.46	24.30	7.10				
2	2.75	3.09	0.069	31.40	12.52	24.50	7.05				
3	2.73	3.13	0.072	31.60	12.51	24.30	7.06				
4	2.71	3.10	0.071	31.50	12.52	24.00	7.08				
5	2.76	3.09	0.073	31.50	12.52	24.70	7.05				
6											
7											
8											
9											
10											
X											
R											
<b>TEST CONDITION</b>	<b>INSTRUMENTS:</b>		WK3260B					<b>AT:</b>	1KHz	0.25V	
	<b>ENVIORNENTS:</b>		TEMP:25 degree HUMDITY :65%								
	<b>STORAGE TEMPERATURE RANGE</b>				-40 $^{\circ}$ C~+85 $^{\circ}$ C						
	<b>OPERATING TEMPERATURE RANGE</b>				-25 $^{\circ}$ C~+85 $^{\circ}$ C						
<b>REMARK:</b>						<b>APPROVED</b>	<b>CHECKED</b>	<b>DRAWN BY</b>			
						姜杰文	姜法寶	王艷			