



REV.	ECN. NO.	APPD.
A		

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃ to +105℃

Contact Material:Phosphor Bronze
 Contact plating:Au Or Sn over Ni
 Insulator Material:PA6T+30%G.F UL94V-0
 Contact plated:Gold Flash

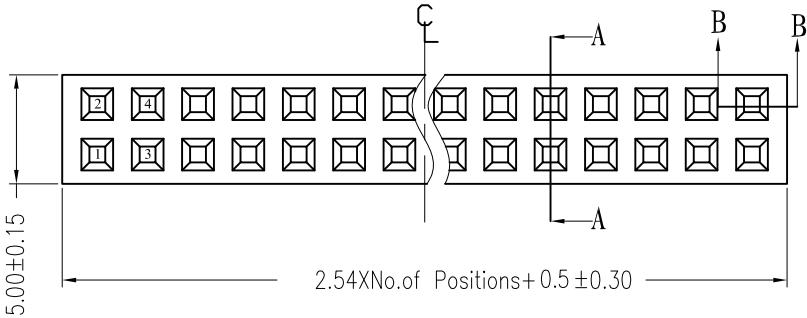


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

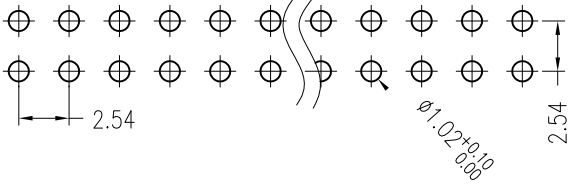


Ordering Information

MTF171-2XXSU1

No.of Pins per
 ROW:02~40PIN

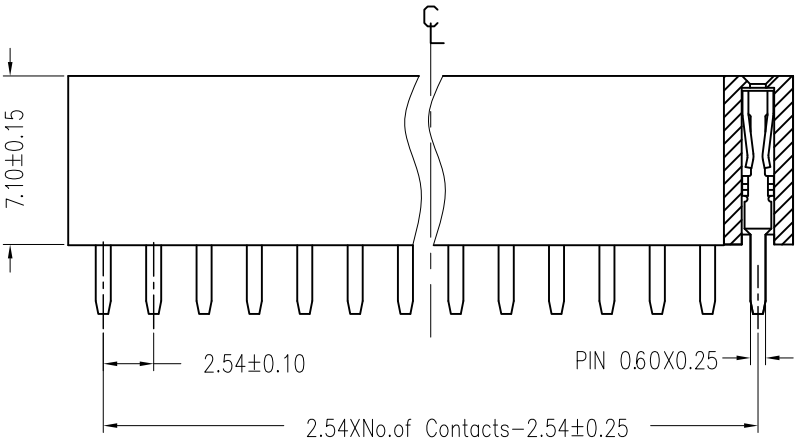

SECTION: B-B



SECTION: A-A

X. ± 0.30	X.° ± 5°	UNITS mm	NAME(INTENDED USE)	MINTRON CO.,LTD.				
.X ± 0.20	.X° ± 2°	MAT'L	PART NO.(INTENDED USE)					
.XX ± 0.10	.XX° ± 1°	FINISH	APPD: SUNNY	TITLE: FEMALE HEADER 2.54mm DUAL ROW DIP 180° H=7.1				
.XXX ± 0.05	.XXX° ± 0.5°		CHKD: LISA	DWG NO.: MTF171-2XXSU1				
FEMALE HEADER CONNECTOR		Q'TY	DR: ZOE 2006-11-28			SCALE 1 / 1	SHEET 1 / 1	REV. A