

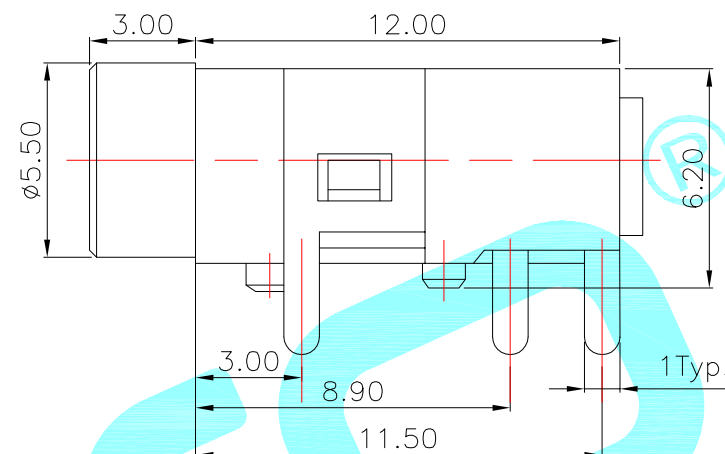


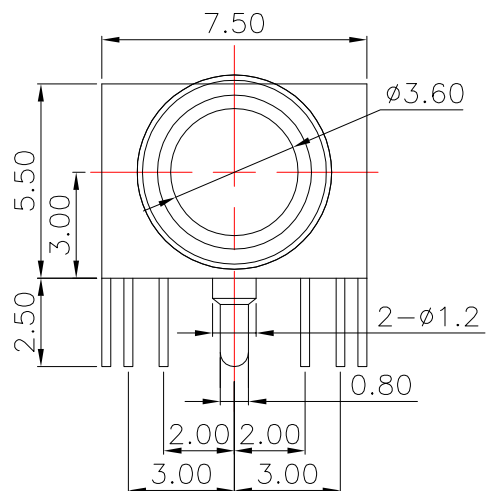

P.C.B LAYOUT(copper-sided view)

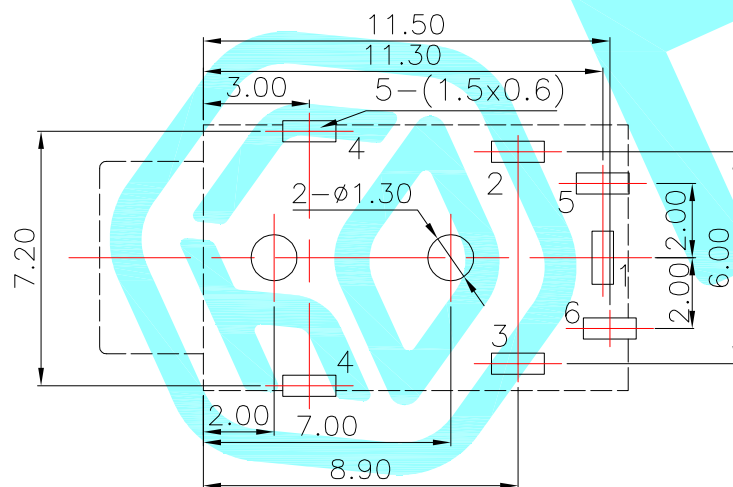

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

Model No.	PJ-3910-A	PJ-3910-B	PJ-3910-C
Schematic			
		PJ-3910-D	PJ-3910-E

②	Terminal	——	6	Phosphor bronze	Ag Plating	——
①	Housing	——	1	PBT	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 hro®		
DRAWN	J.X.Zhang	2013/11/11				
CHECKED						
APPROVALS				TITLE:	PHONE JACKES	
				PART NO.	PJ-3910	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
		±2'	DRAWING NO.	——	PROJ: 	
					SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			