

# MODEL TLH-5955



International size reference: 2/3AA, ER14335

## TECHNICAL DATA

(Typical values @+ 25°C for batteries stored for one year or less)



■ Nominal capacity @ 1.3 mA, to 2 V	1.40 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	75 mA
■ Maximum pulse current capability	150 mA
■ Weight	12.5 g (0.441 oz)
■ Volume	5.2 cc
■ Operating temperature range	-55 °C to +125 °C
■ Li metal content	approx. 0.5 g
■ U.L. Component Recognition, MH 12193	

**TADIRAN**  
**LITHIUM**  
**BATTERIES**

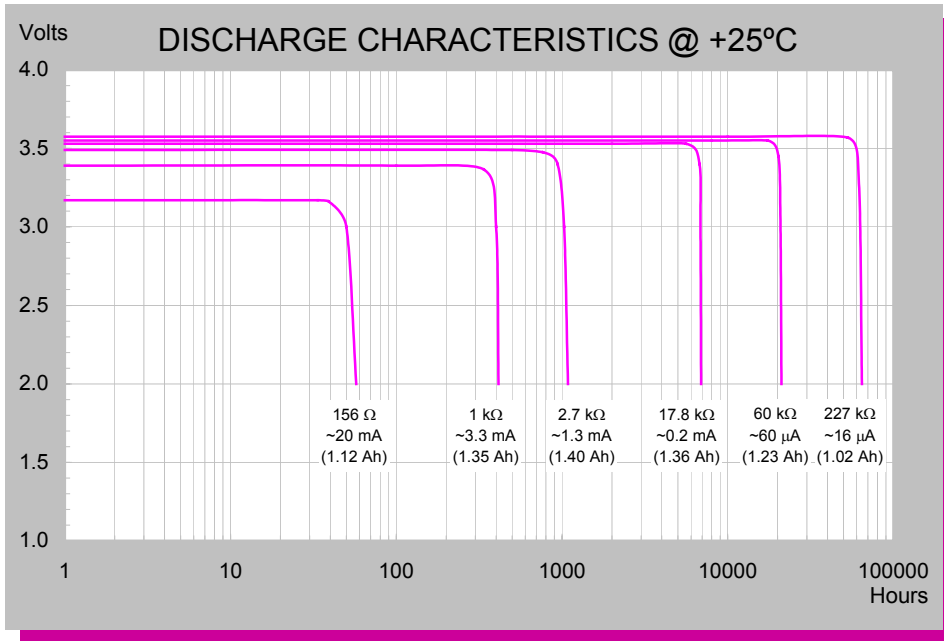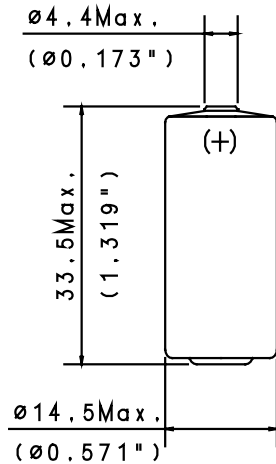

### TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-5955-21505
SUFFIX- /T SOLDER TABS	15-5955-31505
SUFFIX- /P AXIAL PINS	15-5955-41505
SUFFIX- /PT2 RADIAL PINS	15-5955-36505
SUFFIX- /TP POLARIZED TABS	15-5955-52505
SUFFIX- /PT POLARIZED TABS	15-5955-53505

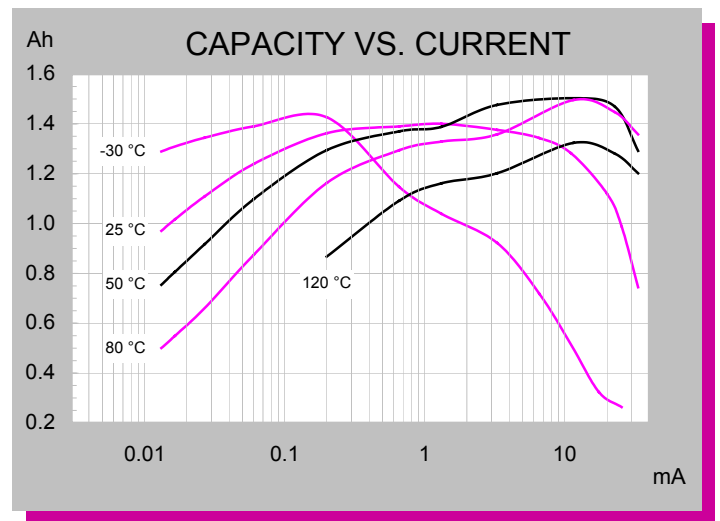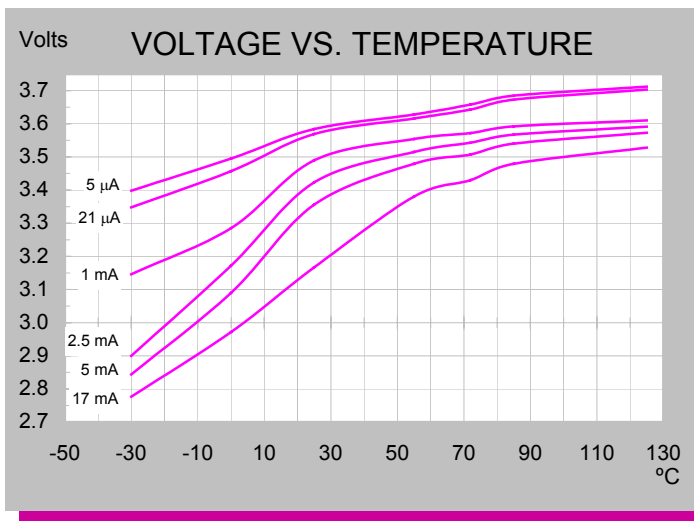

*Extended Temperature Range*

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501187 Rev. A 01/06

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Tadiran Batteries:

[TLH-5955/P](#) [TLH-5955/S](#) [TLH-5955/T](#) [TLH-5955/PT](#) [TLH-5955/TP](#) [TLH-5955/PBP](#) [TLH-5955/SBP](#) [TLH-5955/TBP](#)