


TITLE	PART No.	REV	PAGE
30 AWG, 50 Ohm Coax	50CX-41	X1	1 of 1

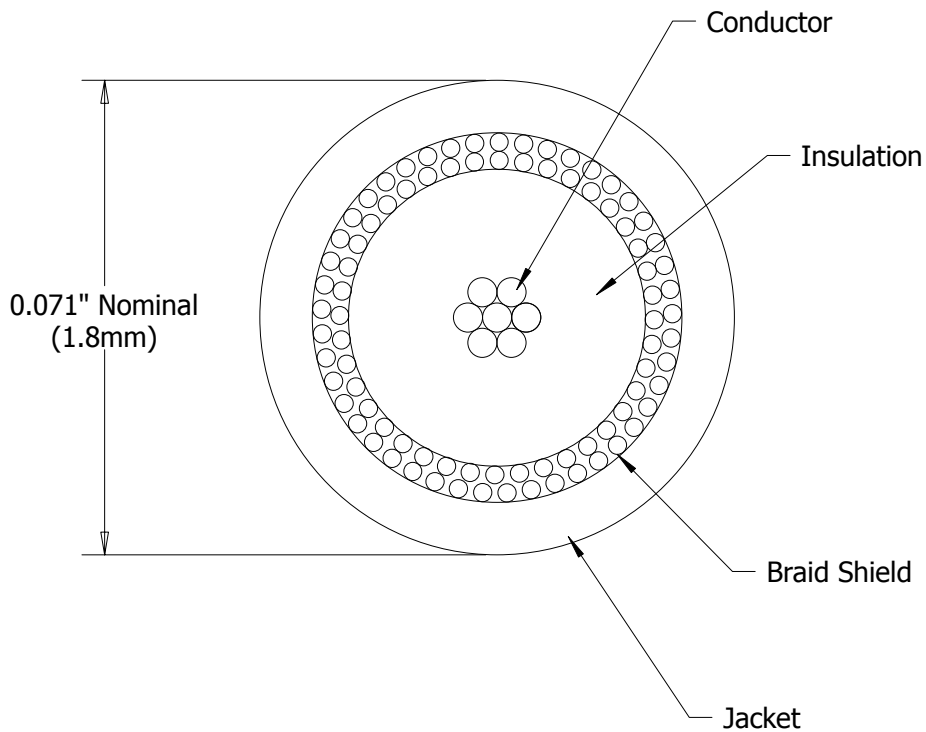

NOTES

Conductor: 30 AWG, 7/38, Silver Plated Copper

Insulation: FEP, 0.033" (0.84mm) Diameter

Braid Shield: 40 AWG, Silver Plated Copper, >95% Coverage

Jacket: FEP

Color: Black

Impedance: 50 +/- 2 Ohms

Capacitance: 30 pF/ft Nominal

Velocity of Propagation: 70%

This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	X1		Preliminary Release		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[50CX-41](#) [100066-0053](#)