


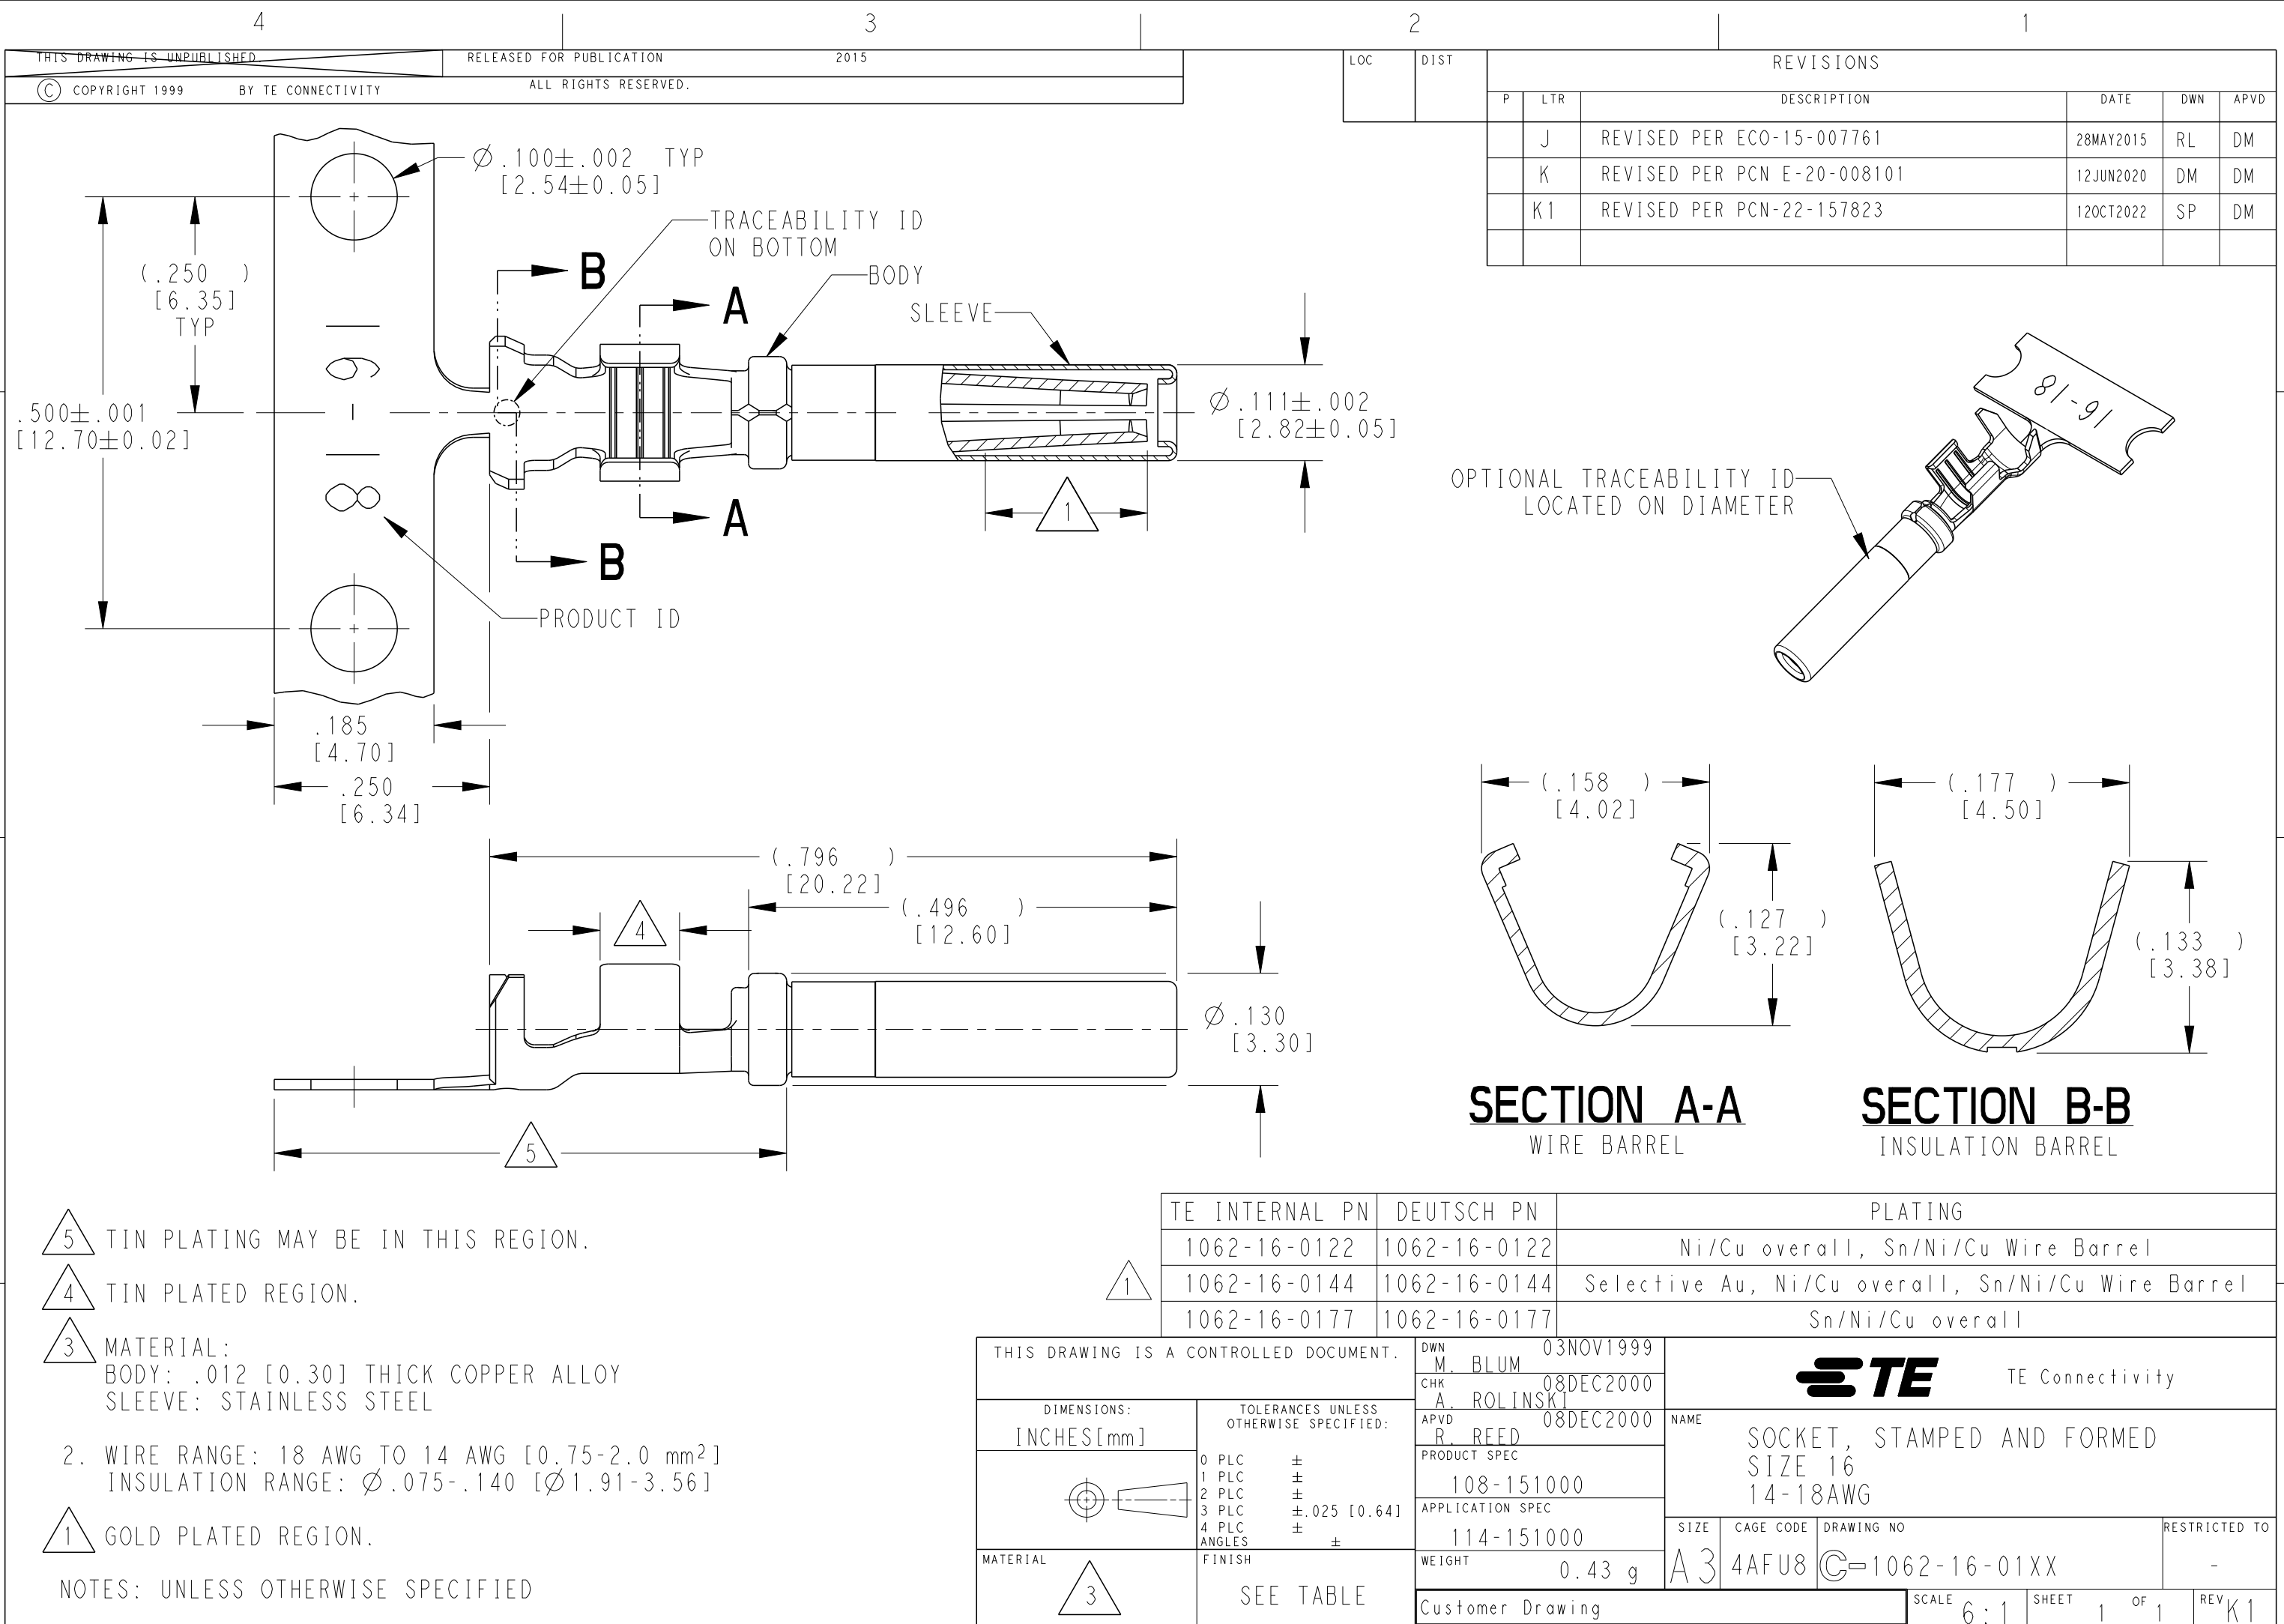

5 TIN PLATING MAY BE IN THIS REGION.

4 TIN PLATED REGION.


3 MATERIAL:
BODY: .012 [0.30] THICK COPPER ALLOY
SLEEVE: STAINLESS STEEL

2. WIRE RANGE: 18 AWG TO 14 AWG [0.75-2.0 mm²]
INSULATION RANGE: Ø .075-.140 [Ø 1.91-3.56]

1 GOLD PLATED REGION.

NOTES: UNLESS OTHERWISE SPECIFIED

TE INTERNAL PN	DEUTSCH PN	PLATING
1062-16-0122	1062-16-0122	Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1062-16-0144	1062-16-0144	Selective Au, Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1062-16-0177	1062-16-0177	Sn/Ni/Cu overall

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BLUM 03NOV1999		 TE Connectivity			
		CHK A. ROLINSKI 08DEC2000					
DIMENSIONS: INCHES[mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SOCKET, STAMPED AND FORMED SIZE 16 14-18AWG			
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ± ANGLES ±					
MATERIAL 		FINISH SEE TABLE		PRODUCT SPEC 108-151000		RESTRICTED TO -	
				APPLICATION SPEC 114-151000			
		WEIGHT 0.43 g		SIZE A3		CAGE CODE 4AFU8	
		Customer Drawing		DRAWING NO C=1062-16-01XX			
				SCALE 6:1		SHEET 1 OF 1	REV K1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[1062-16-0144 \(Mouser Reel\)](#) [1062-16-0122 \(Mouser Reel\)](#) [1062-16-0122 \(Cut Strip\)](#) [1062-16-0144 \(Cut Strip\)](#) [1062-16-0122 \(Loose Piece\)](#) [1062-16-0144 \(Loose Piece\)](#)