


CABLE LENGTH TABLE	
FINISHED LENGTH \pm 2% TOTAL	
MARK PART NO	'L'
3004-335-0.5M	0.5M (1.6 FT)
3004-335-1M	1M (3.28 FT)
3004-335-5M	5M (16.4 FT)

REVISIONS				
ECO	REV	DESCRIPTION	DATE	APPROVED
7486	A	INITIAL RELEASE	10/5/16	J KORDIK
7520	B	DOCUMENT CORRECTION	10/12/16	J Georgiana
7525	C	D-CODED, NOT S-CODED	10/18/16	J KORDIK
8518	D	TEMP -25 TO 90	7/30/20A.N.	L. LIU

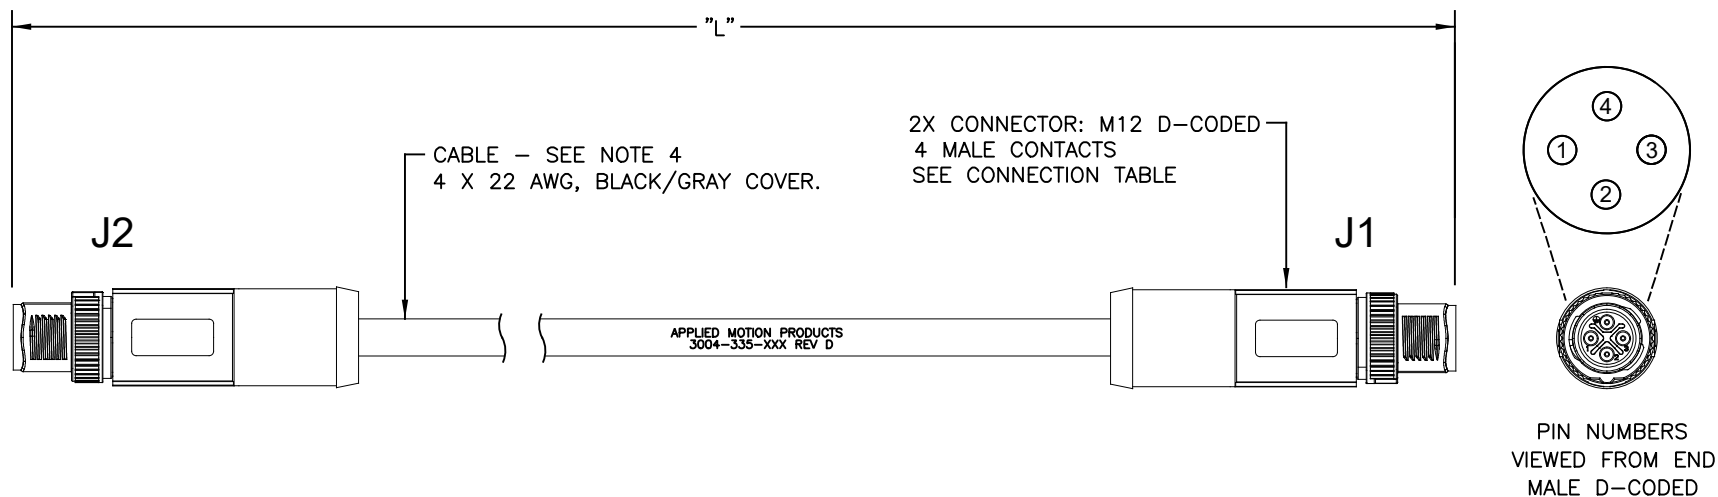

NOTES: UNLESS OTHERWISE SPECIFIED

- THIS CABLE IS MANUFACTURED IN COMPLIANCE WITH THE CURRENT EU RoHS DIRECTIVE.
- REFER TO CONNECTION CHART FOR ASSOCIATED CONNECTOR PINS.
- PROTECTION RATING: IP68.
TEMPERATURE RANGE: -25°C TO $+90^{\circ}\text{C}$,
- CABLES SUPPLIED BY L-COM: 0.5M=M12M124D-0.5, 1M=M12M124D-1, AND 5M=M12M124D-5.

TOLERANCES		THIRD ANGLE PROJECTION		APPLIED MOTION PRODUCTS, INC.	
DECIMALS: MM X.XXX = ± 0.013 X.XX = ± 0.25 X.X = ± 2.5 ANGLES: MACH. = $\pm 5^{\circ}$ CHAM. = $\pm 5^{\circ}$					
		APPROVALS	DATE	CORD SET, STRAIGHT M12 - ETHERNET DAISY CHAIN	
		DRAWN <i>R.JONEZ</i>	8/4/16	B	DWG NO. 3004-335-XXX
		CHECKED <i>K.KESLER</i>	7/30/20		REV D
		APPROVED		SCALE: NTS	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Applied Motion:](#)

[3004-335-1M](#)