


EUR C04 112 F29



F

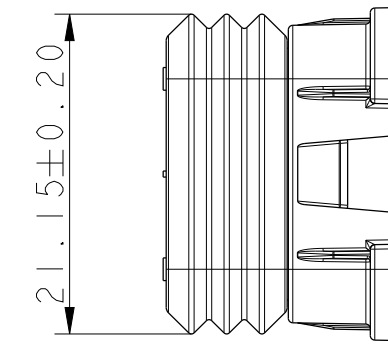

1

A

NOTE :

- 1 - FCI PRODUCT SPECIFICATIONS : FE PS 12 006
 - TEMPERATURE CLASS OF THE CONNECTOR : -40°C ; +125°C
 - VIBRATION CLASS : BODY PROFIL (3.9G / FROM 5 TO 1000HZ)
 - SEALING CLASS : 1000mb INITIAL / 500mb AFTER TEST ENVIRONNEMENT
 2 - PACKAGING : FE PA 12 005
 3 - HANDLING MANUAL : PUI58
 4 - THIS DRAWING IS AN EXTRACT OF THE DETAILS DRAWINGS
 IN CASE OF CONFLICT REFERED TO IT
 5 - RETAINER PULL OUT FORCE ON THE PLUG HOUSING : 100N MINI

APPROXIMATE