



Switches > Slide Switches



Configuration (Pole-Throw): **Four Pole - Double Throw**

Contact Base Material: **Copper**

Number of Actuators: **Single**

Number of Positions: **2**

Operating Function: **On None On**

Features

Configuration Features

Terminals Connected	2-3
Configuration (Pole-Throw)	Four Pole - Double Throw
Number of Actuators	Single
Number of Positions	2
Operating Function	On None On

Electrical Characteristics

Contact Current Rating	.4 A
Operating Voltage	20 VDC

Body Features

Actuator Orientation	Top
Actuator Material	Polyester
Actuator Color	Black

Contact Features

Contact Base Material	Copper
Switch Contact Plating Material	Gold



Termination Features

Termination Post & Tail Length	3.3 mm[.13 in]
Termination Method to PCB	Through Hole - Solder

Dimensions

Actuator Length	2.79 mm[.11 in]
Product Width	9.14 mm[.36 in]
Product Length	15.7 mm[.618 in]

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2023 (233) SVHC > Threshold: Pb (2.59% in component part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought




TE Part #52929-3
PIDG SP SPD 22-16COMM22-18MIL6



TE Part #6609042-3
10VS1=F7248 S0



TE Part #206425-1
17-3 RECPT. REV SEX

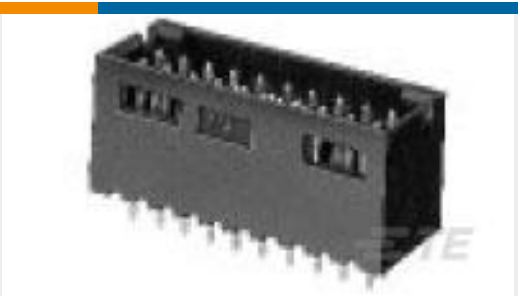

TE Part #5-102618-2
08 MODII HDR DRST SHRD .100CL



TE Part #1546306-2
2P .374" DR BARRIER STRIP



TE Part #1546670-4
4P .437" DR BARRIER,W/BND SCRW



TE Part #103635-1
02 MTE HDR SRRA LATCH .100CL



TE Part #1-6609032-9
20VR6=F7312 S0



TE Part #66740-6
TYPE XII FEMALE CONT (L.P.)

Documents

Product Drawings

TSS41NGPC=SLIDE P/C TERM

English

CAD Files

Customer View Model

ENG_CVM_CVM_2-1437579-5_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1437579-5_A1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2-1437579-5_A1.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



SWITCHES_CORE_PROGRAM_CATALOG

English