



Sensors > Force Sensors > Force Sensor Elements > Compact Compression Load Cell



Force Sensor Element Sensor Type: OEM Compression Load Cells

Full Scale Range: 100 – 100 lbf

Operating Temperature Range: 0 – 50 °C [32 – 122 °F]

Output Signal: 14 Bit I2C

Zero Shift in CTR: ±.05 % of FS

[All Compact Compression Load Cell \(46\)](#)

Features

Product Type Features

Force Sensor Element Sensor Type	OEM Compression Load Cells
----------------------------------	----------------------------

Electrical Characteristics

Supply Voltage	3 VDC
Full Scale Range	100 – 100 lbf

Signal Characteristics

Output Signal	14 Bit I2C
---------------	------------

Usage Conditions

Operating Temperature Range	0 – 50 °C[32 – 122 °F]
-----------------------------	------------------------

Other

Accuracy	±1 % of FS
Force Direction	Compression
Zero Shift in CTR	±.05 % of FS
Sensitivity Shift	±.05 % of FS

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)



EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.26% in component part) Decamethylcyclopentasiloxane (D5) (.12% in component part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | MEAS FX29



Force Sensor Elements(46)

Customers Also Bought




TE Part #1745000-3
8POS MQS REC



TE Part #20009605-19
Compact Compression Load Cell



TE Part #T4110501041-000
M12,FEMALE,STRAIGHT,D CODE,4P, PG7,GOLD

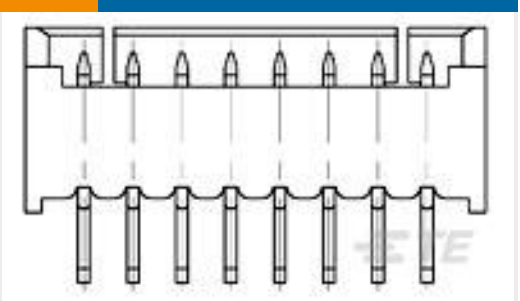

TE Part #1734598-4
1.25 WTB HDR DIP, 4 POS



TE Part #1SNA105031R1400
M4/6



TE Part #T4113411051-000
M12 M, 5P GOLD B_CODE RA SHIELDED PG7



TE Part #1734193-1
WTB Socket,Terminal 80u" Tin

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_20009605-23_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_20009605-23_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_20009605-23_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

FX29 COMPRESSION LOAD CELL

English

