

Customer Information Sheet

DRAWING No.: M22-6003005

SHEET 2 OF 2





IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

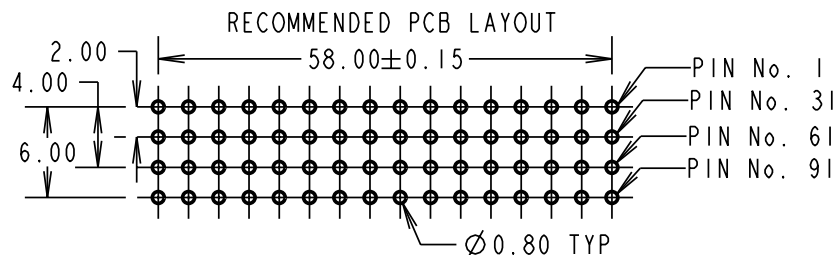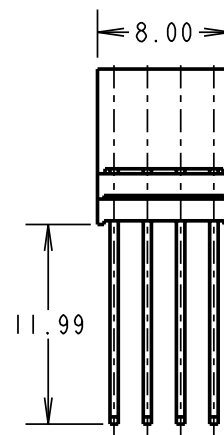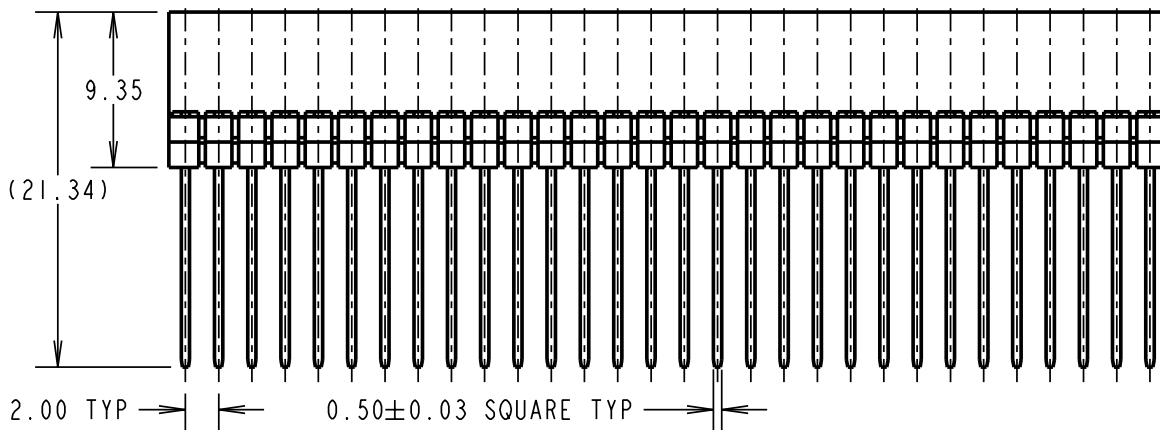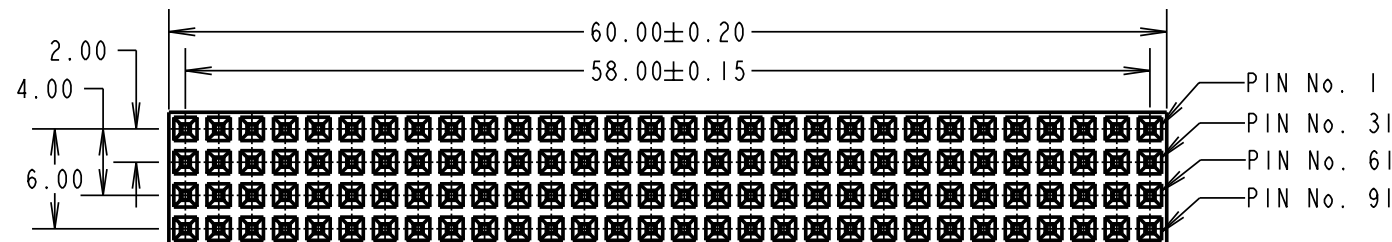

SPECIFICATIONS:

MATERIALS:

MOULDING = HIGH TEMPERATURE NYLON,
UL94V-0, BLACK

CONTACTS = PHOSPHOR BRONZE

FINISH:

CONTACTS = GOLD FLASH OVER NICKEL

ELECTRICAL:

CONTACT RESISTANCE = 30 MILLIOHMS MAX.

INSULATION = 1000 MEGAOHMS MIN.

CURRENT RATING = 1A

VOLTAGE PROOF = 500V AC

MECHANICAL:

AVERAGE INSERTION FORCE = 1N (97.8g)
PER CONTACT

AVERAGE WITHDRAWAL FORCE = 0.8N (81.9g)
PER CONTACT

ENVIRONMENTAL:

TEMPERATURE RANGE = -40°C TO $+105^{\circ}\text{C}$.

PACKING:

TUBE

NOTES.

1. ALL TOLERANCES ARE ± 0.25 UNLESS OTHERWISE STATED.

RA	4	25.02.09	10300
NAME	ISS.	DATE	C/NOTE
APPROVED:	R.ADDE		
CHECKED:	M.G.PLESTED		
DRAWN:	D.BECK		
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ± 1 mm
X.X = ± 0.25 mm
X.XX = ± 0.10 mm
X.XXX = ± 0.01 mm

ANGLES = $\pm 5^{\circ}$

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

S/AREA:

mm²

TITLE:

PCI04 PLUS CONNECTOR
(STACKTHROUGH)

DRAWING NUMBER:

M22-6003005

SHT
2 OF 2