

I/O extension module - NLC-IO-03I-04QRA-05A - 2701960

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




I/O extension module for use with Nanoline 100...240 V AC base unit. Equipped with three digital inputs and four 5 A relay output channels. A maximum of three I/O extension modules can be attached to a base unit.

Why buy this product

- Automatically recognized by the firmware
- I/O modules are electrically isolated
- Up to 3 modules can be added to the right side of a base unit
- Can be powered from a secondary power supply

Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 002620
GTIN	4055626002620

Technical data

Dimensions

Width	40 mm
Height	103.5 mm
Depth	43 mm

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C

Supply

Connection method	Screw connection
Supply voltage	120 V AC/DC
Supply current	typ. 16 mA

I/O extension module - NLC-IO-03I-04QRA-05A - 2701960

Technical data

Digital inputs

Input name	Digital inputs
Description of the input	AC
Connection method	Screw connection
Number of inputs	3
Typical response time	850 µs (on)
	960 µs (OFF)

Digital outputs

Output name	Relay output
Output description	Relay output
Connection method	Screw connection
Number of outputs	4
Maximum output current per channel	5 A
Maximum output current per module / terminal block	20 A
Maximum output current per module	20 A

General


Mounting type	DIN rail
---------------	----------

Environmental Product Compliance


China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing



Connection diagram

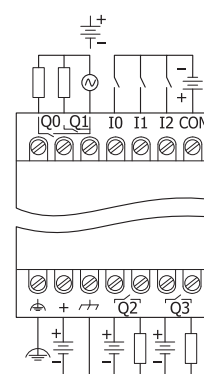

Approvals

Approvals

I/O extension module - NLC-IO-03I-04QRA-05A - 2701960




Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
cULus Listed			

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>