


IB IL 24 SEG

Order No.: 2726324

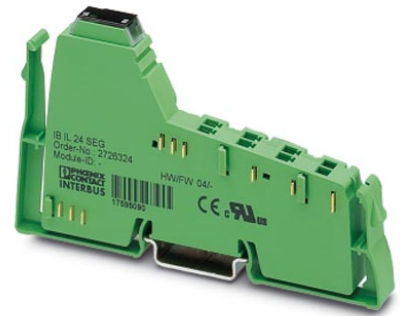

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2726324>

Inline segment terminal, without accessories, 24 V DC, without fuse



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Commercial data

EAN	4017918168162
Pack	1 pcs.
Customs tariff	85389091
Weight/Piece	0.0602 KG
Catalog page information	Page 60 (AX-2007)

Product description

The power and segment terminals supply the Inline station with power.

The power terminal block supplies power to the I/O circuit. This supply input allows electrical isolation from the previous voltage group.

The segment terminal makes it possible to group any number of consecutive terminals into separate segments within an INLINE station.

Power and segment terminals are available both with or without integrated fusing.

The Inline terminals can be labeled using hinged labeling fields. The fields have insert cards that can be labeled individually to suit the application. Additionally, there is the proven ZBFM-6... Zack strip for labeling the terminal points.

Technical data

Interfaces

Type of connection	Inline potential distributor
Interface	Supply voltage

Power supply

I/O voltage	24 V DC
Peripherals voltage range	19.2 V DC ... 30 V DC
Max. current consumption	6 A (8 A)
Fuse	SI 5 x 20 6, 300 AT (in scope of delivery)

General data

Name of protection	Overload protection
Protective circuit/component	Fuse
Weight	42 g
Number of connectors	1
Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

Inline potential routing

Current consumption from U_M	8 A (nominal value)
Segment power supply voltage U_S	24 V DC -15% / +20% (in acc. with EN 61131-2)
Power supply for U_S	8 A (nominal value)

Accessories

Item	Designation	Description
------	-------------	-------------

Marking


2727501	IB IL FIELD 2	Labeling field, width: 12.2 mm
---------	---------------	--------------------------------

Plug/Adapter


2727462	IB IL SCN-PWR IN	Connector, for Inline power and segment terminal blocks
2727637	IB IL SCN-PWR IN-CP	Connector, colored, for Inline power and segment terminal blocks

Drawings


Connection diagram

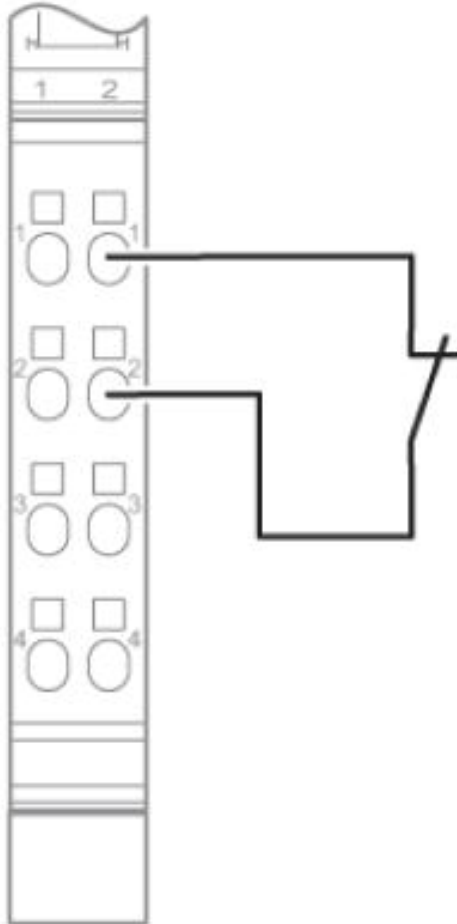

Block diagram

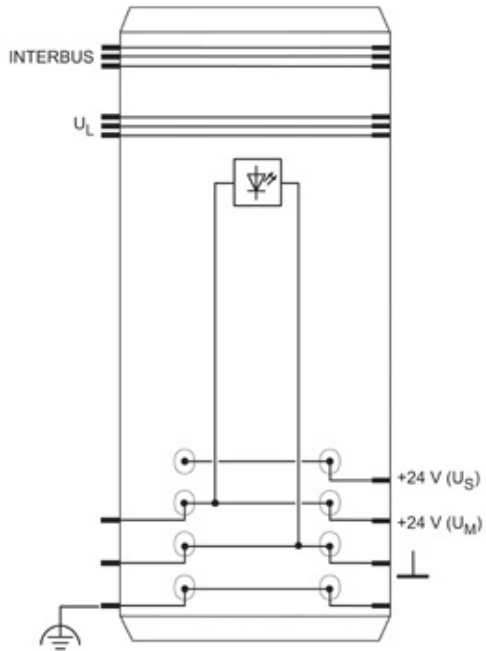

Dimensioned drawing

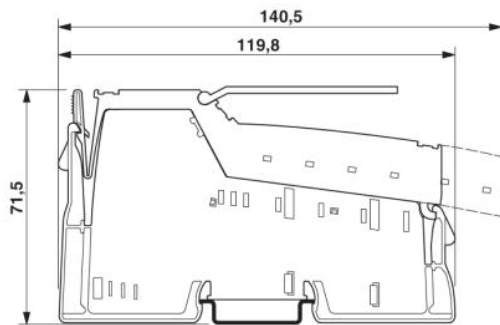

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;